

ES160(B) Series General Vector Inverter User Manual

Shenzhen Dirise Electric Technology Co., Ltd

Preamble

Thanks for choosing DIRISE ES160(B) series general vector inverter. ES160(B) series general vector inverter adopt the philosophy of module functions to design and able to provide solutions for various industries demand.

Please read the manual carefully before usage to make sure using correctly. This manual includes instructions and precautions available for reference. Improper usage may lead to unexpected accidents. This manual as parts that provided along with inverter. Please make sure to safekeeping so that it can help when inverter need repair and maintenance. We reviewed the contents, softwares, hardwares of the manual to keep consistency during edit. However, there may still be some contradiction and fallacy, we will amend in the later version. Any changes in the manual will without prior notice Suggestions about the manual's improvement are

will without prior notice. Suggestions about the manual's improvement are all welcomed.

Notice for use:

The safe operation of the inverter depends on the proper installment, operation, transportation

operation, transportation and maintenance. Therefore, please read the user manual carefully and pay attention to the tips about safety.

• Use the inverter after getting a good understanding of its knowledge, safety information and all the precautions.

• The manual should be kept in those who are actually using inverter.

• The manual divides the security levels into two kind. One is DANGER and the other is WARNING. The marks showing as following:

付 DANGER: If not operate according to instructions in the manual, it may lead to heavy casualties .

此版 warning: If not operate according to instructions in the manual, it may lead to injuries, minor injuries or property damage. Please obey safety specification when seeing these marks. Marked by WARNING may also lead to serious consequences under different circumstances. Please follow the precautions with the two safety marks.

Note: This user manual also suitable for ES160B series inverter.

Version 1.1 revision date October 20, 2022

Catalog

Preamble	
Catalog	
00BA	4
Chapter 1 Safety Precautions-	5
1.1 Installation	5
1.2 Wiring	5
1.3 Operation	5
1.4 Maintenance	
1.5 Scrap	6
1.6 Product Application Range	6
Chapter 2 Product Information	7
2.1 Inspection of the Product Delivery	7
2.2 Specifications of Frequency Inverter's mode	e1s7
2.3 Specifications of Frequency Inverter's name	eplate8
2.4 ES160(B) Series Frequency Inverter	8
2.5 Frequency Inverter's Appearance and Dime	nsion9
2. 6 Product Features	11
2.7 Technical Specifications————	12
2.8 Installation Size of the Keyboard-	13
Chapter 3 Machinery and Electrical Installation	14
3.1 Machinery Installation	14
3.2 Electric Wiring	16
Chapter 4 Keyboard Operation	28
4.1 Keyboard Introduction	28
Chapter 5 Function Parameter Table	30
Chapter 6 Fault Diagnosis and Trouble Shooting	66
6.1 Fault Warning and Solutions	66
6.2 Failure Logging Query	71
6.3 Fault Reset	71
Chapter 7 Guidance Of Electromagnetic Compatibility—	72
7.1 Definition	72
7.2 EMC Standard Introduction	72
7.3 EMC Guidance	72
Chapter 8 Instructions of Optional Accessories	76
8.1 Instructions of Braking Resistor Matc	hing76

Appendix A ModBus Communication Protocol	77
1 Overview	77
2 Serial Port Data Format	77
3 Protocol Frame Format	77
4 Communication Register's Address Scope	78

OOBA

All the products will through strict QC inspection during manufacturing, packaging and delivery. If any mistake, please contact our company, office or agent for solutions as soon as possible.

We will be devoted to the optimization and improvement of products constantly. If any changes, we will updated the manual but without prior notice.

After the product arrival, please be sure of the following items before open box:

- * Whether the package is damaged
- * Whether the nominal power on the nameplate is consistent with the order
- * Whether the inventory time is too long

Chapter 1 Safety Precautions

Users must read the following contents carefully before the installation, wiring, operation and maintenance of the product, obey the safety precautions strictly.

1.1Installation



- Please install the frequency inverter onto incombustible objects like mental to avoid fire.
- It is strictly prohibited that install inverter into environment which with combustible objects or explosive gas. Otherwise there may be an explosion.



- Fix frequency inverter to where can withstand its weight.

 Otherwise people may get hurt or the equipment maybe damaged once it falls down.
- Don't let alien metal fall inside frequency inverter. Otherwise accidents may occur.
- Don't install or operate damaged frequency inverter. Otherwise accidents may occur.

1.2Wiring

/ DANGER

• Add circuit breaker which could match inverter capacity at the same side of power source.

Otherwise there maybe cause casualties, equipment damage or other accidents.

- Inverter's PE end must be firmly grounded. Otherwise there maybe cause electrical shock or fire.
- Tighten the screws of the power input terminal and the motor's output terminal. Otherwise there maybe cause fire.
- Only the professionals that can do wiring.
- Only after the power off and inverter's charging indicator goes out then can wiring.

/!\ WARNING

- Make sure that the input voltage corresponds with what written on the frequency inverter's nameplate. Otherwise the inverter maybe damaged
- Under no circumstances can the power input wire be connected to the frequency inverter's input terminal (U.V.W). Otherwise the inverter maybe damaged.

1.3Operation

/ DANGER

- Don't power on before installed inverter's front cover. Otherwise maybe cause the risk of electrical shock.
- After power on, never touch loop terminals even when inverter not operating. Otherwise maybe cause the risk of electrical shock. /!\ warning
- Stop the frequency inverter by STOP/RESET button or the external control terminals. Don't cut the main power supply directly. Otherwise inverter maybe cause damaged.
- 1.4Maintenance

/ DANGER

- Must wait 10 minutes after the internal charging indicator shut down or the power off, then can do inspection and maintenance. Otherwise maybe cause the risk of electrical shock.
- Only trained professionals can do maintenance for inverter. Otherwise maybe cause the risk of electrical shock and casualties. !\ WARNING
- After maintenance, don't leave such conductive objects as metal inside the frequency inverter. Otherwise inverter maybe cause damaged.
- For the inverters not usage for a very long time, need charge the internal capacitor, increase input voltage (not higher than the inverter's rated voltage) slowly by voltage regulator. Otherwise maybe cause accident.
- 1.5Scrap

/!\ WARNING

- When the frequency inverter scrapped, should be disposed of as industrial waste. Otherwise maybe cause accident.
- 1.6Product Application Range

/ WARNING

- It is not applicable in a machine or system which putting human life at risk.
- Please add security device if users can predict when inverter under abnormal conditions that there will be a severe accident or loss.

Chapter 2 Product Information

2.1 Inspection of the product delivery

Check the following items carefully when opening the package for the first time:

- ◆ If the frequency inverter damaged during transportation.
- ◆ Check the nameplate if the model number and specification consistent with your order.
- ◆ Check with packing list if all things along with the package. Our company develop and produce frequency inverters according to IS09001 strictly. If anything wrong happened please contact with us or our the agents, dealers as soon as possible.
- 2.2 Specifications of Frequency Inverter's models & nameplate

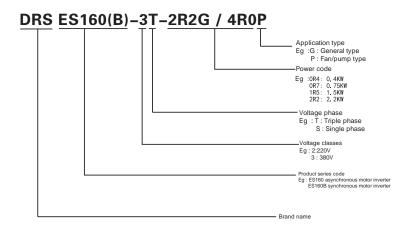


Figure2-1 Specifications of Frequency Inverter's models

2.3 Specifications of Frequency Inverter's nameplate

The nameplate which showing model number and rated value just on the bottom right of the case. Details please refer to figure2-2.

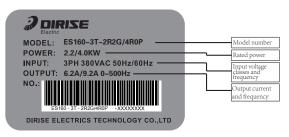


Figure 2-2 Specifications of Frequency Inverter's Nameplate


2.4 ES160(B) Series Frequency Inverter

Sheet 2-1 ES160(B) frequency inverter model number

Voltage classes	Model number	Suitable motor(KW)	Rated output current(A)
	DRS ES160(B)-3T-0R7G/1R5P		
	DRS ES160 (B) -3T-1R5G/2R2P	1	
	DRS ES160 (B) -3T-2R2G/4R0P		
	DRS ES160 (B) -3T-4R0G/5R5P	D1	
	DRS ES160 (B) -3T-5R5G/7R5P	Development	pending
	DRS ES160 (B) -3T-7R5G/011P		
	DRS ES160 (B) -3T-011G/015P		
	DRS ES160 (B) -3T-015G/018P		
	DRS ES160 (B) -3T-018G/022P	18/22	37A/45A
m · 1	DRS ES160 (B) -3T-022G/030P	22/30	45A/60A
Triple phase 380V	DRS ES160 (B) -3T-030G/037P	30/37	60A/75A
pliase 300V	DRS ES160 (B) -3T-037G/045P	37/45	75A/91A
	DRS ES160 (B) -3T-045G/055P	45/55	91A/112A
	DRS ES160 (B) -3T-055G/075P	55/75	112A/150A
	DRS ES160 (B) -3T-075G/090P	75/90	150A/176A
	DRS ES160 (B) -3T-090G/110P	90/110	176A/210A
	DRS ES160 (B) -3T-110G/132P	110/132	210A/253A
	DRS ES160 (B) -3T-132G/160P	132/160	253A/304A
	DRS ES160 (B) -3T-160G/185P	160/185	304A/340A
	DRS ES160 (B) -3T-185G/200P	185/200	340A/377A
	DRS ES160 (B) -3T-200G/220P	200/220	377A/426A

	DRS ES160 (B) -3T-220G/250P	220/250	377A/426A
	DRS ES160 (B) -3T-250G/280P	250/280	465A/520A
Triple	DRS ES160 (B) -3T-280G/315P	280/315	520A/585A
phase 380V	DRS ES160(B)-3T-315G/355P	315/355	585A/650A
	DRS ES160 (B) -3T-355G/400P	355/400	650A/725A
	DRS ES160 (B) -3T-400G/450P	400/450	725A/820A

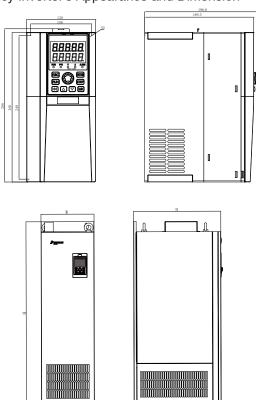2.5 Frequency Inverter's Appearance and Dimension



Power: 132KW-400KW

Sheet2-2 ES160(B) frequency inverter dimension

Voltage classes	Model number	W (mm)	W1 (mm)	H (mm)	H1 (mm)	H2 (mm)	D (mm)	Aperture (mm)
	DRS ES160 (B) -3T-0R7G/1R5P							
	DRS ES160 (B) -3T-1R5G/2R2P							
	DRS ES160 (B) -3T-2R2G/4R0P							
	DRS ES160 (B) -3T-4R0G/5R5P							
	DRS ES160 (B) -3T-5R5G/7R5P			1	サバ 及・・	•		
	DRS ES160(B)-3T-7R5G/011P							
	DRS ES160(B)-3T-011G/015P							
	DRS ES160(B)-3T-015G/018P							
	DRS ES160 (B) -3T-018G/022P	205	140	344	328	320	205	6, 5
	DRS ES160 (B) -3T-022G/030P	200	140	344	320	320	200	0. 5
	DRS ES160 (B) -3T-030G/037P	230	200	445	434	425	215	6, 5
	DRS ES160 (B) -3T-037G/045P	230	200	440	404	420	210	0.5
	DRS ES160 (B) -3T-045G/055P	300	190	505	483	465	270	9.0
三相 3807	DRS ES160 (B) -3T-055G/075P	300	190	505	400	400	210	9.0
0001	DRS ES160 (B) -3T-075G/090P	340	220	600	585	570	305	9.0
	DRS ES160 (B) -3T-090G/110P	340	220	000	565	310	300	9.0
	DRS ES160 (B) -3T-110G/132P	380	220	680	665	645	305	9.0
	DRS ES160 (B) -3T-132G/160P	310	180	960	870. 5	_	437	12.0
	DRS ES160 (B) -3T-160G/185P	310	100	900	610.5		401	12.0
	DRS ES160 (B) -3T-185G/200P	310	200	1086, 2	970. 5	1070	520	14.0
	DRS ES160 (B) -3T-200G/220P	310	200	1000. 2	310. 5	1070	320	14.0
	DRS ES160 (B) -3T-220G/250P							
	DRS ES160 (B) -3T-250G/280P	340	210	1223	1109. 5 12:	1210	550	14.0
	DRS ES160 (B) -3T-280G/315P						L	
	DRS ES160 (B) -3T-315G/355P							
	DRS ES160 (B) -3T-355G/400P	340	220	1382	1267. 5	1370	567. 5	16.0
	DRS ES160 (B) -3T-400G/450P							

This sheet showing our company's standard products dimension. Some other models may exist difference. If any changes due to products updated that will no prior notice. For more information, please contact us.

2.6 Product Features

- 1.Able to provide professional solutions for industries. Able to do secondary development according to demand.
- 2.Adopt specialized control chip for motor and advanced optimized magnetic flux vector control algorithm, to make it have better operation characteristics.
- 3. Standard LED keyboard. Multi-channel monitoring parameters can be set flexibly.
- 4. 6–CH programmable multi–functional input terminals,2–CH programmable multi–functional open circuit collector output terminals, and 2–CH programmable relay output.
- 5. 2–CH analog signal (0 \sim +10V, 0 \sim 20mA) input channels, 2–CH (0 \sim +10V, 0 \sim 20mA) analog signal output channels.
- External terminals has 7-stage speed to choose, programmable multi-speed to run.
- 7.Standard configuration enhanced PID regulator, to make it convenient for users to have reliable closed-loop control for temperature, pressure and flow.
- 8.Standard built-in braking unit, able to flexible adjust energy consumption braking starting voltage and brake action ratio according to demand.
- 9.Standard RS485 interfaces, easy to let PLC, IPC and other industrial controllers to connect with inverter. Also enable multiple inverters connected so that to realize coordinated operation.
- 10. More than 20 kinds of protections such as input out-phase, output out-phase, over-current, overload, over-voltage and short circuit, to realize quick and efficient protection for inverters and motors.


2.7 Technical Specifications

Sheet 2-3 Technical Specifications


Rated input voltage Single-Phase 220V ± 20% Three-Phase 380V ± 20% Three-Phase 280V ± 20	Function description		Specification Index
Rated output voltage Rated output current Frequency inverter rated output current Frequency inverter rated output current Overload capacity Gtyps machine: 150% rated current 1 minute, 180% rated current 10 seconds Ptyps machine: 150% rated current 10 minute, 180% rated current for 10 seconds Ptyps machine: 120% rated current for 1 minute, 150% rated current for 10 seconds Ptyps machine: 120% rated current for 1 minute, 150% rated current for 10 seconds Ptyps machine: 120% rated current for 10 minute, 150% rated current for 10 seconds Ptyps machine: 120% rated current for 10 minute, 150% rated current for 10 seconds Ptyps machine: 120% rated current for 10 minute, 150% rated current for 10 seconds Ptyps machine: 120% rated current for 10 minute, 150% rated current for 10 seconds Ptyps machine: 120% rated current for 10 minute, 150% rated current Ptyps machine: 120% rated current for 10 minute, 150% rated current Ptyps machine: 120% rated current for 10 minute, 150% rated current Ptyps machine: 120% rated current for 10 minute, 150% rated for 1	Power input	Rated input voltage	Three-Phase 220V ± 20%
Rated output current Frequency inverter rated output current		Rated input frequency	50 ~ 60Hz (±5%)
Overload capacity Overload current for 10 seconds Overload for for output Overload for for output Overload for		Rated output voltage	No greater than the input voltage
Overload capacity Oseconds Ptype machine: 120% rated current for 1 minute, 150% rated current for 10 seconds Ptype machine: 120% for 10 seconds Ptype machine:		Rated output current	Frequency inverter rated output current
Control method Closed-loop vector control (FVC); V / F control Maximum frequency 500Hz Frequency resolution Simulation given: 0.1Hz Simulation given: maximum frequency x 0.1% Speed range 1:200 (SVC) : 1:1000 (FVC) Rotating speed FVC:±2%; SVC:5Hz above±5% Torque compensation Fixed torque lifting, arbitrary torque lifting Acceleration and deceleration curves Acceleration/deceleration on time Automatic Voltage Regulation Overcurrent, voltage stall Overcurrent, voltage stall DC braking Brake time: 0.00S ~ 30.00S Brake action curvent overcurrent voltage trip DC braking Brake time: 0.00S ~ 30.00S Brake action current value: 0.00% ~ 150.00% External power source 10V/10mA 24V/150mA Digital input 50 Iterminals, one of which supports up to 100KHz high-speed pulse input 1 10 terminal 2 relay output terminals. Analog input Ali:0 ~ 10V/0 voltage input Al2:0 ~ 10V/0 ~ 20mA output Al2:0 ~ 10V/0 ~ 20mA output Al3:0 ~ 10V/0 ~ 20mA output Al3:0 ~ 10V/0 ~ 20mA output Al2:0 ~ 10V/0 ~ 20mA output Al3:0 ~ 10V/0 ~ 20mA output Al	Power output	Overload capacity	10 seconds P type machine: 120% rated current for 1 minute, 150% rated
Frequency resolution Speed range 1:200 (SVC); 1:1000 (FVC) Rotating speed Fixed torque lifting, arbitrary torque lifting Acceleration and deceleration curves Acceleration/deceleration time Automatic Voltage Regulation Overcurrent, voltage stall Do braking External power source Digital input Peripheral interface Peripheral interface Analog input Analog output Anal		Control method	Closed-loop vector control (FVC);
Speed range 1:200 (SVC); 1:1000 (FVC)		Maximum frequency	500Hz
Rotating speed FVC:±2%; SVC:5Hz above±5%		Frequency resolution	
Torque compensation Acceleration and deceleration curves Acceleration deceleration curves Acceleration deceleration time Automatic Voltage Regulation Overcurrent, voltage stall DC braking External power source Peripheral interface Peripheral interface Analog input Analog output Analog output Analog output Analog output Analog input Analog output Analog output Analog input Analog output Analog output Analog input Analog output Analog outp		Speed range	1:200 (SVC) ; 1:1000 (FVC)
Acceleration and deceleration curves Acceleration curvent Acceleration curvent Acceleration curvent Acceleration to prevent Acceleration		Rotating speed	FVC: ±2%; SVC:5Hz above ±5%
Straight line, S curve		Torque compensation	Fixed torque lifting, arbitrary torque lifting
Automatic Voltage Negulation Number Negulation			Straight line, S curve
Regulation output voltage constant Overcurrent, voltage stall frequent vorreurent and voltage during operation to prevent frequent over-current voltage trip DC braking DC brake frequency:0.10 m 2 60.00 m 2 Brake time: 0.00 2 30.00 S Brake action current value: 0.00 150.00			0. 01S ~ 600. 00S
Peripheral interface Digital output			
DC braking Brake time. 0.005 ~ 30.005		Overcurrent, voltage stall	
Peripheral interface Peripheral interface Digital output		DC braking	Brake time: 0.005~30.00S
Peripheral interface Digital output		External power source	10V/10mA 24V/150mA
Peripheral interface Digital output Output 1 D0 terminal 2 relay output terminals		Digital input	
Analog output A01: 0~10V/0~20mA output A02: 0~10V/0~20mA output 485 Communication Support for standard Modbus communication protocols LED display Double line digital display Keyboard Keypad 8 operation keys Protect Fault protection function Input phase loss, output phase loss, overcurrent protection, overvoltage protection, undervoltage protection, overheat protection, overload protection, to with the control of the co		Digital output	output 1 D0 terminal
Altitude Support for standard Modbus communication protocols		Analog input	AI1:0 \sim 10V voltage input AI2:0 \sim 10V/0 \sim 20mA input
LED display Double line digital display		Analog output	A01: 0 ~ 10V/0 ~ 20mA output
Reyboard Keypad 8 operation keys Protect Fault protection function Input phase loss, output phase loss, overcurrent protection, overvoltage protection, undervoltage protection, overheat protection, overload protection, etc. Indoor, no direct sunlight, no dust, corrosive gas, flammable gas, oil mist, water vapor, water dripping or salt, etc Below 1000 m		485 Communication	Support for standard Modbus communication protocols
Protect Fault protection function Input phase loss, output phase loss, overcurrent protection, overvoltage protection, undervoltage protection, overheat protection, overload protection, etc Indoor, no direct sunlight, no dust, corrosive gas, flammable gas, oil mist, water vapor, water dripping or salt, etc Below 1000 m	V 1	LED display	Double line digital display
Protect Fault protection function overload protection, undervoltage protection, overheat protection, overload protection, etc overload protection, overheat protection, overhe	Keyboard	Keypad	8 operation keys
Environment Altitude Below 1000 m	Protect Fault protection function		overvoltage protection, undervoltage protection, overheat protection,
Altitude Below 1000 m		Installation site	Indoor, no direct sunlight, no dust, corrosive gas, flammable gas, oil mist, water vapor, water dripping or salt, etc
Ambient temperature	Environment	Altitude	Below 1000 m
		Ambient temperature	-10℃~ +40℃

2.8 Installation Size of the Keyboard

Item	W	Н	D	D1
Dimensions (mm)	70	105	33.8	16







Suitable for all ES160(B) models

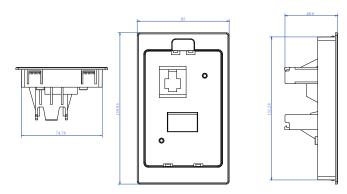


Figure 2-3 Keyboard Size and Keyboard Aperture Size (Unit :mm)

Chapter 3 Machinery and Electrical Installation

3.1 Machinery Installation

3.1.1 Installation environment


- 3.1.2 Installation site
- ◆ Installation sites need without corrosive, combustible or explosive gas and liquid;
- ◆ The humidity of installation sites need lower than 90%, no condensation of water droplets:
 - ◆ The vibration of installation sites need less than 5.9m/s2 (0.6g);
- ◆ Don't install the frequency inverter in sites with lots of dust and metal powder;


If user has special requirement, please consult with our company beforehand.

3.1.3 Safeguard procedures

During installation, please take effective safeguard procedures to prevent metal chips when drilling or dust fall into inverter. After installation, please remove the protective cover.

3.1.4 Installation spacing and heat dissipation Installation method is wall-mounted. The installation spacing and distance for single frequency inverter please refer to figure 3-1. When two frequency inverters adopt above/under mounting, need to add guide plate like figure 3-2.








Figure 3-2 Multiple inverters installation



- ◆ The higher the environmental temperature, the shorter the frequency inverter service life.
- ♦ Remove the heat-producing device which near the inverter to the places as far as possible. In

addition, when the inverter installed into cabinet, need consider verticality and space so that make it easy for heat dissipation.

3.1.5 Screw fixation method

Adopt the method of two holes of opposite angles mounting, the hole size please refer to inverter dimension and installation size. Drill two holes on the installation surface, lean the inverter against the installation surface and align at the holes, then fix the screws through holes and tighten. Chosen M4*L combination screws with plain and spring washers (The length L longer than 12mm, tightening torque 1N. m±10%). Details please refer to Figure3-3.




Figure3-3 Screw fixation method

3.1.6 Keyboard's disassembly and installation

A. Keyboard's disassembly, showing as Figure 3-4, firstly press keyboard's elastic buckle by direction 1. Then lift up the keyboard by direction 2. B. Keyboard's installation, showing as Figure 3-5, put the keyboard flush into the keyboard slot, then press keyboard by direction 1 until hear the Click sound meanwhile the keyboard on a level with front surface then OK.





Figure3-4 Keyboard's disassembly

Figure 3-5 Keyboard's installation

3.1.7 Terminal cover's disassembly and installation
A. Terminal cover's disassembly, showing as Figure3-6, press the buckle
position of terminal cover by direction 1 and disassemble it by direction 2.
B. Terminal cover's installation, showing as Figure3-7, install the upper
buckle into the corresponding position by direction1, then press the side
buckle by the direction 2, at last press by the direction 3 until hear click
sound at the juncture.






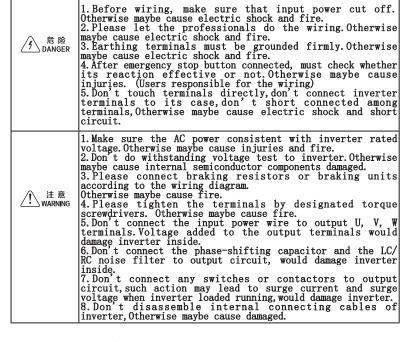


Figure3-7 Terminal cover's installation

3.2 Electric Wiring

After open the terminal cover, will show connecting terminals. Check all the main circuit terminals and control circuit terminals clearly marked or not. Notice the following items when wiring:

- 1. The frequency inverter's main circuit power terminals (R/L1, S/L2, T/L3) are input power terminals. If connected to other terminals mistakenly, inverter will damaged. In addition, need to make sure that the power supply within the range of allowable voltage and current marked on the nameplate.
- 2. The earthing terminal must grounded firmly, on one hand able to avoid an electric shock and fire, on the other hand able to decrease the noise pollution.
- 3. Make sure that screws tightened between terminals and wires so that to avoid spark when screw get vibratory and turn loose.
- 4. Don't operate when charged with electricity.



3.2.1 Connecting and configuration of peripheral equipments The diagram among ES160(B) series inverter and peripheral equipments showing as Figure 3-8

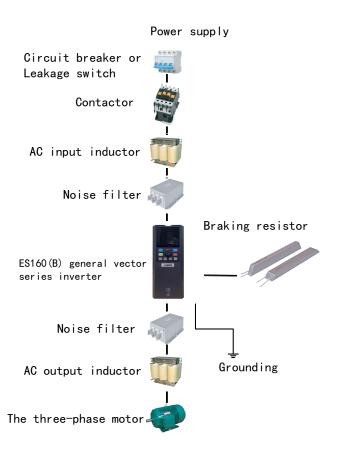


Figure 3-8 ES160(B) series inverter and peripheral equipments connecting diagram

3.2.2 Connection diagram of main circuit terminals and control circuit terminals The standard wiring diagram of ES160(B) series inverter main circuit and control circuit showing as Figure 3-9

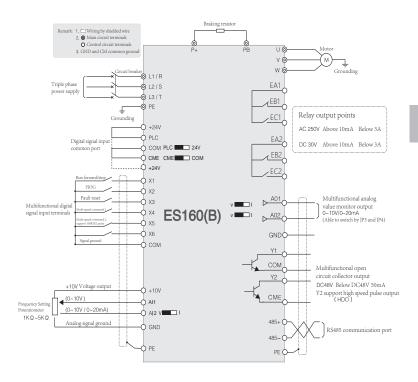


Figure3-9 Standard wiring of main circuit and control circuit

• If the loaded of multifunctional output terminals is inductive load(eg relay coil), must parallel freewheel diodes at both ends of load.

The distance between power cable and inverter or the control cable inside cabinet must
be at least 100mm, never put in the same wiring trough. If signal wire have to through the
power cable, these two has to stay orthogonal (90° angle). Control cable must adopt
shielded twisted pair, the shielding layer need connect with GND of terminals, power cable
the best choose sheathing and shielding cable.
 ▶ Because it's inevitable for inverter to have strong electromagnetic interference,

so it will cause negative influence to kinds of electrical equipments and electric instruments in the same place. To restrain electromagnetic interference, able to put the output cable of frequency inverter into metal casing with grounding, or use sheathing and shielding cable, and grounding the shielding layer. In addition, add magnetic rings to the output cable will also restrain electromagnetic interference effectively.

3.2.3 Main circuit terminals' function

ES160(B) series inverter main circuit terminals showing as below




ES160(B) 0.4KW-15KW main circuit terminal diagram




ES160(B) 18KW-22KW main circuit terminal diagram




ES160(B) 30KW-37KW main circuit terminal diagram




ES160(B) 45KW-55KW main circuit terminal diagram



ES160(B) 75KW-90KW main circuit terminal diagram



ES160(B) 110KW main circuit terminal diagram



ES160(B) 132KW-400KW main circuit terminal diagram

Mark	Function Description					
R、S、T	AC power input terminals, triple phase R/S/T or single phase R/T					
U, V, W	Inverter output terminals, connect to triple phase AC asynchronous motors					
P+、P-	Positive and negative electrode connecting terminals of DC Bus					
PB	External braking resistor connecting terminals. One end connect to P+ and the other end connect to PB					
PE	Grounding					

- \bullet Never connect other terminals to 380V AC power except R/S/T. Otherwise inverter maybe damaged.
- Verify whether the inverter's rated input voltage consistent with AC power supply's voltage.
- If the input voltage classes not the same, maybe cause inverter damaged.
- \bullet Must ground connection the inverter's grounding terminal and the motor's case. Ground wire need use copper wire cable with its cross section over $4cm^2, and$ ground resistance must less than $10\,\Omega.$
- Must connect non-fuse breaker between power supply and inverter, in case of accident enlarging, distribution equipments damaged, fire etc which caused by inverter's failure.

3.2.4 Main circuit wiring

ES160(B) inverter main circuit wiring showing as Figure3-10




Figure3-10 Main circuit standard wiring diagram

3.2.5 Main circuit input side wiring

◆ Circuit breaker installation

Must install air circuit breaker (MCCB) of corresponding inverter between power supply and input terminals.

 $\mbox{MCCB}\mbox{'s capacity should be 1.5 to 2 times as much as inverter rated current.}$

MCCB's time characteristic should meet the time characteristic of inverter's overheat protection (150% rated current per 1 minute).

When MCCB shared by multiple inverters or other equipments, please follow Figure 3-11, connect the touch spot of inverter malfunction output relay with power contactor coil in series. When malfunction signal, able to cut off power supply.

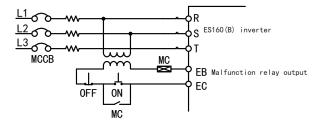


Figure3-11 Main circuit breaker wiring diagram

◆ Electromagnetic contactor installation

Connect electromagnetic contactor which matched with inverter power like Figure3-11 showing. Don't use electromagnetic contactor of the incoming line side frequently to control inverter's running and stop. Frequent operation like this way is the important reason cause inverter damaged. If need to control by electromagnetic contactor of the incoming line side indeed, then operation interval time cannot lower than 30 minutes per time. When power restoration, inverter could not work automatically.

◆ AC inductor installation

When input power supply including capacitive load, will produce very strong surge current, that maybe cause inverter damaged. If it happens, please connect triple phase/single phase AC inductor (optional) to the input side of inverter. In this way, not only can restrain peak current and voltage, but also improve system's power factor.

◆ Noise filter installation

In order to restrain the noise of power grid side into inverter as well as restrain the inverter noise into power grid, inverter need adopt dedicated noise filter. Common filter bad effect, so not recommended. Figure 3-12 showing correct noise filter installation method and Figure 3-13 showing wrong installation method.

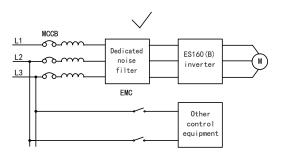


Figure3-12 Noise filter correct installation diagram

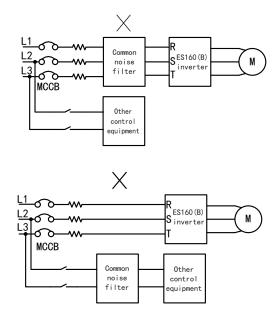


Figure3-13 Noise filter wrong installation diagram

◆ Motor wiring installation

Connect inverter's output terminals U, V, W with motor's input terminals U, V, W. During running, confirm if motor rotate in forward direction when given run forward command. If need change motor's rotation direction, just interchange any two wires of inverter's U, V, W terminals is OK.

◆ Prohibit connecting power supply with output terminals Never connect power line to output terminals. Load voltage to output terminals will damage inverter's internal components.

◆ Prohibit output terminals short circuit or grounding Never touch output terminals directly, or short connected output wires and inverter's case. Otherwise, maybe cause electric shock or short circuit. In addition, never short connected output wires.

lacktriangle Prohibit using phase-shifting capacitor

Never connect phase advance electrolytic capacitor or LC/RC filter to the output circuit. Otherwise, inverter maybe damaged.

◆ Prohibit electromagnetic switch

Never connect electromagnetic switch or electromagnetic contactor to the output circuit. Otherwise when such device triggered, over current and over voltage protections will also triggered, what's more, even damage inverter's inside components.

◆ Noise filter installation

Connect noise filter to inverter output side able to decrease induction interference and radio interference. Induction interference: electromagnetic induction let signal wires loaded noise, which lead to control equipment making mistake. Radio interference: The high-frequency electromagnetic wave emitted by inverter itself or cables, will interfere to radio equipments nearby, and then producing noise during it receive signal. Noise filter installation of output side showing as Figure 3-14.

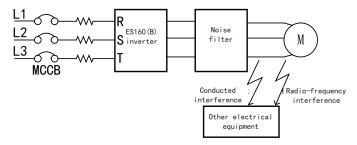


Figure 3-14 Noise filter installation of output side

◆ Example for anti-interference installation

To restrain inductive interference of output side, in addition to install noise filter as mentioned above, can also adopt the method of put all the output cable into grounding metal tube. The interval between output cables and signal wires over 30cm will let inductive interference significantly reduced. Input cables, output cables and inverter itself all produce radio-frequency interference, install noise filters on both input and output sides, as well as shield inverter itself by metal box can reduce radio-frequency interference, showing as Figure3-15. When multiple inverters used at the same time, recommend grounding method like Figure3-16.




Figure 3-15 Anti-interference installation wiring

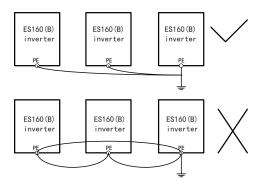


Figure 3-16 Recommended grounding method

3.2.7 Control circuit terminals' functions

ES160(B) series inverter control circuit terminals showing as below

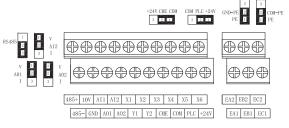


Figure3-17 control circuit terminals

Control circuit terminals' functions description

Category	Terminal Mark	Function Description	Electrical Spec	Internal Circuit
	X1	Able to program by		
	X2	the function codes to realize inverter's	Input impedance: 3.3KΩ Input voltage: 0~20V Input frequency: <1KHz Effective when low level.	× 3 1 1 1
Digital multifunctional	X3	start,stop,forward and reverse rotation.X5/HDI terminals have high speed pulse input function,the highest frequency is		3.3k
terminal	X4			
	X5/HDI			
	X6	100KHZ.		
Switching value	Y1	Able to program by the function codes to output inverter's status like forward/reverse	Open collector output; Load capacity;	Y1 Y1
output terminal	Y2/HDO	rotation, frequency etc. Y2/HDO can be set high speed pulse output mode, the highest frequency is 100KHZ.	50mA/24V; Output frequency: <1KHz;	


Switching value	EC1	EC1/EC2,EB1/	Contact capacity: 3A/250VAC	EA1
output terminal	EA2 EB2 EC2	EB2,EA1/EA2 is relay's normal	Output frequency: 50Hz	EB1

Category	Terminal Mark	Function Description	Electrical Spec	Internal Circuit
Analog value input&output terminals	AII	input,AI2 analog voltage/ current input (Default is voltage input,can toggle voltage/current by	Voltage source: Input voltage: $0\sim10V$ Input impedance: $1M\Omega$ Current source:(optional) Input current: $0-20mA$; Input impedance: 250Ω Resolution ratio: 0.2%	All
	i v (i i i AI2			All
				Al2
	AO1	Able to program by the function codes to AO output outward inverter's	Output voltage: 0~10V	
	AO2	frequency,setting frequency etc. Able	Load capacity: <4mA Resolution radio: 0.1V	AO V

Chapter 4 Keyboard Operation

4.1 Keyboard introduction

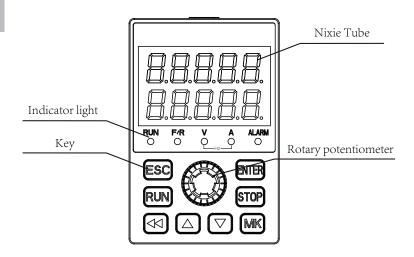The keyboard of ES160(B) series general vector inverter consist of four parts: 5-digit 8-segment Nixie Tube, 5 indicator light, 8 keys and 1 rotary potentiometer. Users can operate by keyboard to realize start, stop, condition monitoring, fault inquiry, parameter revision and speed adjustment etc. Keyboard appearance showing as Figure4-1.



This keyboard suitable for all ES160(B) models

Figure4-1 Keyboard introduction

Keyboard each part's function description

Shape	Name	Function Description
888.95	5-digit Nixie Tube	Display parameter code, parameter value, monitor state etc
FUN F/R V A ALAFM	5 indicator light	RUN: When inverter run, it's on, when stop, it's off. When flashes means inverter in the process of slowdown to stop. F/R: Run forward it's off, Run reverse it's on. A: When it's on, means present data unit is ampere V: When it's on, means present data unit is volt A/V: When both on, means present data unit is hertz Alarm: When it's on, means inverter is in fault alarm
	1 potentiometer	Change the given frequency source, realize inverter's speed adjustment
ESC	ESC	Back to previous menu, or cancel parameter modification
•	UP	Increase parameter code, parameter value or parameter group
4	SHIFT	Shift running status, monitoring data or parameter position
•	DOWN	Decrease parameter code, parameter value or parameter group
ENTER	ENTER	Enter parameter menu, confirm modified value
RUN	RUN	The key of run command
МК	МК	Multifunctional key, able to set to invalid, JOG, forward/reverse
STOP	STOP	The key of stop command, or fault resetting

Chapter 5 Function Parameter Table

"O": mean parameter can be changed when inverter running

"O": means parameter can't be changed when inverter running

"X": means parameter can only be read, can't be changed

Group POO: Basic function

Code	Description	Setting range	Default	Property
P00.00	No.1 Motor control mode	0:SVC 1:FVC 2:V/F control	0	0
P00. 01	Command source	0:Keyboard(LED off) 1:Terminals(LED on) 2:Communication(LED flash)	0	0
P00. 02	Main frequency input	0:Digital set(Power-off no memory) 1:Digital set(Power-off memory) 2:AI1 3:AI2 4:AI3 5:Set by pulse (X5) 6:Multistage instruction 7:Simple PLC 8:PID 9:Communication given The same as P00.02	0	©
P00. 03	Auxiliary frequency input	The same as POO.02	0	0
P00. 04	Auxiliary frequency instruction range selection when superposition	0:Relative to maximum frequency 1:Relative to main frequency instruction	0	0
P00. 05	1:Relative to main frequency instruction	0% ~ 150%	100%	0
P00. 06	Frequency source superposition selection	Ones place:Frequency instruction selection O:Main frequency instruction 1:Main & auxiliary calculation result (computational relationship depend on tens place) 2:Main frequency instruction switch to auxiliary frequency instruction switch to main & auxiliary reduction switch to main & auxiliary calculation result 4:Auxiliary frequency instruction switch to main & auxiliary calculation result Tens place:Frequency source main & auxiliary computational relationship O:Main+Auxiliary I:Main-Auxiliary I:Main-Auxiliary Z:Maximum one of both 3:Minimum one of both	00	0

P00. 08	Preset frequency	0.00 ∼ maximum frequency(P00.14)	50.00Hz	0
P00.09	Running direction	0:Run forward 1:Run reverse	0	0
P00. 10	Reference frequency of acceleration and deceleration time	0:Maximum frequency(P0-14) 1:Set frequency 2:100HZ	0	0
P00. 11	Acceleration time 1	0. $00s \sim 650$. $00s$ (P00. $13=2$) 0. $0s \sim 6500$. $0s$ (P00. $13=1$) $0s \sim 65000s$ (P00. $13=0$)	Depend on Inverter	0
P00. 12	Deceleration time 1	$\begin{array}{l} 0.\ 00s \sim 650.\ 00s\ (P00.\ 13=2) \\ 0.\ 0s \sim 6500.\ 0s\ (P00.\ 13=1) \\ 0s \sim 65000s\ (P00.\ 13=0) \end{array}$	Depend on Inverter	0
P00. 13	Unit of acceleration and deceleration time	0:1 second 1:0.1 second 2:0.01 second	1	0
P00. 14	Maximum frequency	50.00Hz ∼ 500.00Hz	50.00Hz	0
P00. 15	Upper limiting frequency	Lower limiting frequency POO.18 ~ Maximum frequency POO.14	50.00Hz	0
P00. 16	Upper frequency limit instruction selection	0:Set by P00.15 1:AII 2:AI2 3:AI3 4:Set by pulse 5:Communication given	0	0
P00. 17	Upper limiting frequency bias	0.00Hz \sim Maximum frequency P00.14	0.00Hz	0
P00. 18	Lower limiting frequency	0.00Hz \sim Upper limiting frequency POO.15	0.00Hz	0
P00. 19	Carrier frequency	0.5kHz \sim 16.0kHz	Depend on Inverter	0
P00. 20	Carrier frequency adjustment by Load	0:No 1:Yes	0	0
P00. 21	Bias frequency of superposition auxiliary frequency instruction	0.00HZ \sim Maximum frequency P00.14	0.00HZ	0
P00. 22	Frequency instruction resolution ratio	1: 0.1HZ 2: 0.01HZ	2	0
P00. 23	Inverter shutdown memory selection of digital setting frequency	0:No 1:Memory	0	0
P00. 24	Motor parameters selection	0:Motor parameter 1 1:Motor parameter 2	0	0
P00. 25	Frequency instruction UP/DOWN standard when running	0:Running frequency 1:Setting frequency	0	0

P00. 26	Running instruction bind main frequency instruction selection	Hundreds place:Communication binding frequency source selection Tens place:Terminal binding frequency source selection Ones place:Keyboard binding frequency source selection O:No binding 1:Set by digital frequency 2:AII 3:AI2 4:AI3 5:Set by pulse (X5) 6 (Multi-speed 7:Simple PLC 8:PID 9:Set by communication	0000	0
P00. 27	Communication protocol selection	0:MODBUS protocol 1:Reserved	0	0
P00. 28	G/P type showing	0:G type(type of constant torque load) 1:P type(type of fan & pump load)	Depend on motor	X

Group PO1: No.1 motor parameters

Code	Description	Setting range	Default	Property
P01.00	Motor type selection	0:Common asynchronous motor 1:Variable-frequency asynchronous motor 2:Permanent magnet synchronous motor	0	0
P01.01	Motor rated power	0.1kW \sim 1000.0kW	Depend on motor	0
P01. 02	Motor rated voltage	$1\sim 2000V$	Depend on motor	0
	Motor rated current	0.01A ~ 655.35A(inverter power ≤ 55KW) 0.1A ~ 6553.5A(inverter power>55KW)	Depend on motor	0
	Motor rated frequency	0.01Hz \sim maximum frequency	Depend on motor	0
P01.05	Motor rated rotation speed	$1 \mathrm{rpm} \sim 65535 \mathrm{rpm}$	Depend on motor	0
P01.06	Asynchronous motor stator resistor	0.001 Ω \sim 65.535 Ω (inverter power \lesssim 55KW) 0.0001 Ω \sim 6.5535 Ω (inverter power>55KW	Tuning parameter	0
P01. 07	Asynchronous motor rotor resistor	0.001 Ω \sim 65.535 Ω (inverter power $\lesssim 55$ KW) 0.0001 Ω \sim 6.5535 Ω (inverter power>55KW)	Tuning parameter	0
P01. 08	Asynchronous motor leakage inductive reactance	0.01mH ~ 655.35mH(inverter power ≤ 55KW) 0.001mH ~ 65.535mH(inverter power>55KW)	Tuning parameter	0
P01. 09	Asynchronous motor mutual inductance resistance	0.01mH ~ 655.35mH(inverter power ≤ 55KW) 0.001mH ~ 65.535mH(inverter power>55KW)	Tuning parameter	0

P01. 10	Asynchronous motor no-load current	0.01A ~ P1-03(inverter power ≤ 55KW) 0.1A ~ P1-03(inverter power>55KW)	Tuning parameter	0
P01. 16	Synchronous motor stator resistance	0.001 Ω \sim 65.535 Ω (inverter power \lesssim 55KW) 0.0001 Ω \sim 6.5535 Ω (inverter power>55KW)	Tuning parameter	0
P01. 17	Synchronous motor D-axis inductance	0.01mH ~ 655.35mH(inverter power ≤ 55KW) 0.001mH ~ 65.535mH(inverter power>55KW)	Tuning parameter	0
P01. 18	Synchronous motor Q-axis inductance	0.01mH ~ 655.35mH(inverter power ≤ 55KW) 0.001mH ~ 65.535mH(inverter power>55KW)	Tuning parameter	0
P01. 20	Synchronous motor back electromotive force coefficient	0.0V ∼ 6553.5V	Tuning parameter	0
P01. 27	Encoder lines quantity	$1 \sim 65535$	1024	0
P01. 28	Encoder type	0:ABZ incremental encoder 1:UVW incremental encoder 2:Rotary encoder 3:Sin-Cos encoder 4:Save wire mode UVW encoder	0	
P01.30	ABZ incremental encoder AB phase sequence	0:Forward 1:Reverse	0	0
P01.31	Encoder mounting angle	$0.0 \sim 359.9^{\circ}$	0°	0
P01.32	UVW encoder UVW phase sequence	0:Forward 1:Reverse	0	0
P01.34	Rotary transformer Number of pole pairs	$1 \sim 65535$	1	0
P01.36	Detection time to feedback PG disconnection	0.0s: No action 0.1s ~ 10.0s	0.0s	0
P01.37	Tuning selection	0:No operation 1:Asynchronous motor static part parameter tuning 2:Asynchronous motor dynamic full tuning 3:Asynchronous motor static full tuning 11:Synchronous motor loaded tuning 12:Synchronous motor no load tuning	0	0

Group PO2: No.1 motor vector control parameter

Code	Description	Setting range	Default	Property
P02.00	Speed ring proportional gain 1	1 ~ 100	20	0
P02. 01	Speed ring integral time 1	0.01s ~ 10.00s	0.50s	0

P02. 02	Switching frequency 1	0.00 ∼ P02.05	5.00Hz	0
P02. 03	Speed ring proportional gain 2	1 ~ 100	20	0
P02. 04	Speed ring integral	0.01s ~ 10.00s	1.00s	0
P02. 05	Switching frequency 2	PO2.02 ~ maximum frequency	10.00Hz	0
P02.06	Vector control slip	50% ~ 200%	100%	0
P02. 07	SVC speed feedback filter time	$0.000s \sim 0.100s$	0.015s	0
P02. 09	Torque upper limit instruction selection under speed control mode	0:Set by PO2.10 1:All 1:All 2:Al2 2:Al2 2:Al2 3:Al3 4:Pulse (X5) 5:Communication given 6:MIN(Al1, Al2) 7:MAX(Al1, Al2) Full scale of item 1 ~ 7 corresponding to PO2.10	0	0
P02. 10	Torque upper limit digital setting under speed control mode	0.0% ~ 200.0%	150.0%	0
P02. 11	Torque upper limit instruction selection under speed control mode (Generate electricity)	0:Set by PO2.12(Not distinguish Generate electricity and Electromotion) 1:All 2:Al2 3:Al3 3:Al3 3:Al3 6:MIN (Al1, Al2) 7:MAX (Al1, Al2) Full scale of item 1 ~ 7 corresponding to PO2.12	0	0
P02. 12	Torque upper limit digital setting under speed control mode (Generate electricity)	0.0% ~ 200.0%	150.0%	0
P02. 13	Excitation regulation proportional gain	$0 \sim 60000$	2000	0
P02. 14	Excitation regulation integral gain	$0 \sim 60000$	1300	0
P02. 15	Torque regulation proportional gain	$0 \sim 60000$	2000	0
P02. 16	Torque regulation integral gain	0 ~ 60000	1300	0
P02. 17	Speed ring integral property	0:Invalid 1:Valid	0	0
P02. 18	Synchronous motor field- weakening mode	0, 1, 2	1	0
P02. 19	Synchronous motor field-weakening gain	$0 \sim 50$	5	0
P02. 21	Flux-weakening area maximum torque coefficient	50 ∼ 200%	100%	0

P02. 22	Generated power restrict enabling/Power generation torque upper limit take effect to enabling	0:Invalid 1:Valid	0	0
P02. 23	Generated power upper limit/Synchronous motor output voltage upper limit margin	$0.0 \sim 200.0$ $0.0 \sim 50\%$	Depend on inverter	0
P02. 24	Synchronous motor initial position corner detection current	80% ~ 180%	120%	0
P02. 25	Synchronous motor initial position corner detection	0, 1, 2	0	0
P02. 27	Synchronous motor saliency rate gain adjustment	50 ~ 500	100	0
P02. 28	Maximum torque current ratio control	0, 1	0	0
P02. 32	Z signal correction	0, 1	1	0
P02. 36	Low speed exciting current	30% ~ 80%	30%	0
P02. 37	Low speed carrier frequency	0.8K \sim P00.19	1.5K	0
P02. 41	Synchronous motor inductance detection current	30% ~ 120%	80%	0
P02. 43	Zero servo enabling	$0 \sim 1$	0	0
P02.44	Switch frequency	$0.00 \sim P02.02$	0.30HZ	0
P02. 45	Zero servo speed loop proportion gain	1 ~ 100	10	0
P02. 46	Zero servo speed loop integral time	$0.01s \sim 10.00s$	0.50s	0
P02.49	Free from tuning mode	0, 1, 2	0	0
P02. 50	Online back electromotive force calculation	0, 1	0	0
P02. 51	SVC initial position angle compensation	0.0° ∼ 359.9°	0.0	0

Group PO3: V/F control parameter

Code	Description	Setting range	Default	Property
P03. 00	V/F curve setting	0: Straight line V/F 1:Multi-point V/F 2:Square V/F 3:To the power of 1.2 V/F 4:To the power of 1.4 V/F 6:To the power of 1.6 V/F 8:To the power of 1.8 V/F 9:Reserved 10: V/F complete separation mode 11:V/F semi-separation mode	0	0

P03. 01	Torque boost	0.0%: (without torque boost) 0.1% ~ 30.0%	Depend on inverter	0
P03. 02	Torque boost cut-off frequency	0.00Hz ~ maximum frequency	50.00Hz	0
P03. 03	Multi-point V/F frequency point 1	0.00Hz ∼ P03.05	0.00Hz	0
P03. 04	Multi-point V/F voltage point 1	0.0% ~ 100.0%	0.0%	0
P03. 05	Multi-point V/F frequency point 2	P03.03 ∼ P03.07	0.00Hz	0
P03.06	Multi-point V/F voltage point 2	$0.0\% \sim 100.0\%$	0.0%	0
P03. 07	Multi-point V/F frequency point 3	$P3-05 \sim \text{Motor rated power}$ (P01.04)	0.00Hz	0
P03. 08	Multi-point V/F voltage point 3	0.0% ~ 100.0%	0.0%	0
P03. 10	V/F over-excitation gain	$0 \sim 200$	64	0
P03.11	V/F oscillation suppression gain	$0 \sim 100$	40	0
P03. 13	V/F separated voltage source	0:Digital given (PO3.14) 1:A11 2:A12 3:A13 4:Set by pulse (X5) 5:Multistage instruction 6:Simple PLC 7:PlD 8:Communication given Note:100% corresponding to motor rated voltage	0	©
P03.14	V/F separated voltage digital given	$0\sim$ motor rated voltage	OV	0
P03. 15	V/F separated voltage acceleration time	0.0s \sim 1000.0s Note:Meaning the time from 0V to motor rated voltage	0.0s	0
P03. 16	V/F separated voltage deceleration time	0.0s \sim 1000.0s Note:Meaning the time from 0V to motor rated voltage	0.0s	0
P03. 17	V/F separation stop method selection	0:Frequency/voltage decreasing to 0 separately 1:Voltage decreasing to 0 firstly then frequency decreasing	0	0
P03. 18	Overcurrent stall action current	50% ~ 200%	150%	0
P03. 19	Overcurrent stall Enable	0:Invalid I:Valid	1(Valid)	0
P03. 20	Overcurrent stall gain suppression	$0 \sim 100$	20	0
P03. 21	Overcurrent stall action current compensation coefficient	50 ∼ 200%	50%	0
P03. 22	Overvoltage stall action voltage	Type triple phase 380V ~ 480V:330.0 ~ 800.0V Type triple phase 220V ~ 240V:330.0 ~ 800.0V	760. 0V	0

P03. 23	Overvoltage stall Enable	0:Invalid 1:Valid	1(Valid)	0
P03. 24	Overvoltage stall frequency gain suppression	$0 \sim 100$	30	0
P03. 25	Overvoltage stall voltage gain suppression	$0 \sim 100$	30	0
P03. 26	Overvoltage stall maximum rising frequency limit	$0\sim 50$ HZ	5HZ	0

Group PO4: Input terminal

Code	Description	Setting range	Default	Property
P04.00	X1 terminal function selection	0:No function 1:Nun forward or run command 2:Run reverse or running direction 1:Note: Set to 1 or 2, need match with F4-	1	0
	X2 terminal function selection		4	0
P04. 02	X3 terminal function selection	3 Three-wire running control 5 Neverse, JAB (KJOC) 1 Three-wire running to the control 1 Three running to the control of the c	9	0
P04. 03	X4 terminal function selection	7:Terminal Down 8:Free stop 9:Reset	12	0
P04. 04	X5 terminal function selection	10 Running suspend 11 External fault normally open input	13	0
P04. 05	X6 terminal function selection	12:Wultiple instruction terminal 1 13:Wultiple instruction terminal 2	0	0
P04.06	X7 terminal function selection	14: Multiple instruction terminal 3 15: Multiple instruction terminal 4.	0	0
P04. 07	X8 terminal function selection	selection terminal 1 17:Acceleration and deceleration time	0	0
P04. 08	X9 terminal function selection	3. Three-wire running control 4. Forward 10st (100) 5. Reverse, 10st (100) 6. Reminal 10wn 6. Freminal 10wn	0	©
P04, 10	DI filtering time	$0.000s \sim 1.000s$	0.010s	0

P04. 11	Terminal command mode	0:Two-wire 1 1:Two-wire 2 2:Three-wire 1 3:Three-wire 2	0	0
P04. 12	Terminal UP/DOWN change rate	0.001Hz/s ~ 65.535Hz/s	1.00Hz/s	0
P04. 13	AI curve 1 minimum input	0.00V ∼ P04.15	0.00V	0
P04. 14	Corresponding setting of AI curve I minimum input	-100.0% ~ +100.0%	0.0%	0
P04. 15	AI curve 1 maximum input	P04.13 ∼ +10.00V	10.00V	0
P04. 16	Corresponding setting of AI curve 1 maximum input	-100.0% ~ +100.0%	100.0%	0
P04. 17	AI1 filtering time	0.00s ~ 10.00s	0.10s	0
P04. 18	AI curve 2 minimum input	0.00V ∼ P04.20	0.00V	0
P04. 19	Corresponding setting of AI curve 2 minimum input	-100.0% ~ +100.0%	0.0%	0
P04. 20	AI curve 2 maximum input	P04.18 ∼ +10.00V	10.00V	0
P04. 21	Corresponding setting of AI curve 2 maximum input	-100.0% ~ +100.0%	100.0%	0
P04. 22	AI2 filtering time	0.00s ∼ 10.00s	0.10s	0
P04. 23	AI curve 3 minimum input	−10.00V ~ P04.25	-10.00V	0
P04. 24	Corresponding setting of AI curve 3 minimum input	-100.0% ∼ +100.0%	-100.0%	0
P04. 25	AI curve 3 maximum input	P04. 23 ∼ +10. 00V	10.00V	0
P04. 26	Corresponding setting of AI curve 3 maximum input	−100.0% ~ +100.0%	100.0%	0
P04. 27	AI3 filtering time	$0.00s \sim 10.00s$	0.10s	0
P04. 28	Pulse minimum input frequency	0.00kHz ∼ P04.30	0.00kHz	0
P04. 29	Corresponding setting of pulse minimum input frequency	−100.0% ~ 100.0%	0.0%	0
P04. 30	Pulse maximum input frequency		50.00kHz	0
P04. 31	Corresponding setting of pulse maximum input frequency	-100.0% ∼ 100.0%	100.0%	0
P04. 32		$0.00s \sim 10.00s$	0.10s	0
P04. 33	AI curve selection	Ones place: All curve selection 1:Curve 1(2 points, see P04.13 \sim P04.16) 2:Curve 2(2 points, see P04.18 \sim P04.21) 3:Curve 3(2 points, see P04.23 \sim P04.26) 4:Curve 4(4 points, see P23.00 \sim P23.07) 5:Curve 5(4 points, see P23.08 \sim P23.15) Tens place: Al2 curve selection, the same as above Hundreds place: Al3 curve selection, the same as above	321	0
P04.34	AI below minimum input setting selection	Ones place:AII below minimum input setting selection 0:Corresponding minimum input setting 1:0.0% Tens place:AI2 below minimum input setting selection, the same as above Hundreds place:AI3 below minimum input setting selection, the same as above	000	0

P04. 35	X1 delay time	$0.0s \sim 3600.0s$	0.0s	0
P04. 36	X2 delay time	$0.0s \sim 3600.0s$	0.0s	0
P04. 37	X3 delay time	$0.0s \sim 3600.0s$	0.0s	0
P04. 38	DII terminal effective mode option l	O:Effective when high level I:Effective when low level Ones place:X1 Tens place:X3 Hundreds place:X3 Thousands place:X4 Ten thousands place:X5	00000	0
P04. 39	DII terminal effective mode option 2	O:Effective when high level I:Effective when low level Ones place:X6 Tens place:X7 Hundreds place:X8 Thousands place:X9 Ten thousands place:Reserved	00000	0

Group PO5: Output terminal

Group PO5: Output terminal						
Code	Description	Setting range	Default	Property		
P05.00	Y2 terminal output mode selection	0:Pulse output(FMP) 1:Switching value output(FMR)	0	0		
P05.01	Y2 output function selection	0:No output 1:In inverter running 2:Malfunction output(Malfunction	0	0		
P05. 02	Relay R1 function selection	in free stop) 3:Frequency level detection FDT1	2	0		
P05. 03	Relay R2 function selection	outpuf 4:Frequency arrival 5:In zero-speed running (No output when stop) 6:Motor overload pre-alarm 7:Inverter overload pre-alarm 8:Setting count value arrival 9:Designated count value arrival 10:Length arrival 11:Simple PLC circulation completed 12:Accumulated running time arrival 13:In the frequency limit 14:In the torque limit 15:Readv to running 16:AII>AII 17:Upper limiting frequency arrival 18:Lower limiting frequency arrival (No output when stop) 19:Undervoltage condition 20:Communication setting 21:Reserved	0	0		
P05. 04	Yl output function selection	20: Communication setting 21: Reserved 22: Reserved 22: Reserved 23: In zero-speed running(Still output when stop) 24: Accumulated power-on time arrival 25: Frequency level detection FDT2 output 26: Frequency 1 arrival 27: Frequency 2 arrival 28: Current 1 arrival 28: Current 2 arrival 30: Timing arrival 31: All input ultralimit	1	0		

P05. 04	Yl output function selection	32:In off- load 33:In reverse running 34:Zero current condition 35:Module temperature arrival 36:Output current ultralimit 37:Lower limiting frequency arrival(Still output when stop) 38:Alarm(All fault) 39:Motor overheat 40:Running time arrival of this time 41:Fault output(For the fault of free stop and no output when undervoltage)	1	0
P05. 06	Y2 output function selection	0:Running frequency 1:Setting frequency 2:Output current	0	0
P05. 07	A01 output function selection	2:Output current 3:Motor output torque(Absolute value, the percentage relative to motor) 4:Output power	0	0
P05. 08	AO2 output function selection	motor) 4:Output power 5:Output voltage 6:Pulse input(100.0% corresponding to 100.0kHz) 7:A11 8:A12 9:A13 10:Length 11:Count value 12:Communication setting 13:Motor speed 14:Output current(100.0% corresponding to 1000.0A) 15:Output voltage(100.0% corresponding to 1000.0Y) 16:Motor output torque(Actual value, the percentage relative to motor)	1	0
P05. 09	Y2 maximum output frequency	0.01kHz ~ 100.00kHz	50.00kH	0
P05. 10	A01 zero offset coefficient	-100.0% ∼ +100.0%	0.0%	0
P05. 11	AO1 gain	-10.00 ~ +10.00	1.00	0
P05. 12	AO2 zero offset coefficient	-100.0% ∼ +100.0%	0.0%	0
P05. 13	AO2 gain	-10.00 ~ +10.00	1.00	0
P05. 17	Y2 output delay time	0.0s ~ 3600.0s	0.0s	0
P05. 18	RELAY1 output delay time	0.0s ~ 3600.0s	0.0s	0
P05. 19	RELAY2 output delay time	0.0s ~ 3600.0s	0.0s	0
P05. 20	Y1 output delay time	0.0s ∼ 3600.0s	0.0s	0
P05. 22	DO output terminal effective condition selection	0:Positive logic 1:Negative logic Ones place:Y Tens place:RELAY1 Hundreds place:RELAY2 Thousands place:YI Ten thousands place:Reserved	00000	0

Group P06: Start-stop control

Code	Description	Setting range	Default	Property
P06. 00	Starting mode	0:Direct starting 1:Rotational speed tracking starting 2:Pre-excitation starting 3:SVC starting	0	0
P06. 01	Rotational speed tracking mode	1:Begin from zero speed 2:Begin from maximum frequency	0	0
P06. 02	Fast or slow of rotational speed tracking	$1 \sim 100$	20	0
P06.03	Starting frequency	0.00Hz ~ 10.00Hz	0.00Hz	0
P06.04	Starting frequency hold time	0.0s ~ 100.0s	0.0s	0
P06. 05	Starting DC braking current/Pre-excitation current	0% ~ 100%	50%	0
P06.06	Starting DC braking time/Pre-excitation time	$0.0s \sim 100.0s$	0.0s	0
P06. 07	Acceleration and deceleration mode	O:Straight line mode 1:Static S curve mode 2:Dynamic S curve mode	0	0
P06. 08	S curve begin stage time proportion	0.0% ~ (100.0%- P6.09)	30.0%	0
P06. 09	S curve end stage time proportion	0.0% ~ (100.0%- P6.08)	30.0%	0
P06. 10	STOP mode	0:Deceleration stop 1:Free stop	0	0
P06. 11	STOP DC braking beginning frequency	0.00Hz \sim maximum frequency	0.00Hz	0
P06. 12	STOP DC braking waiting time	$0.0s \sim 100.0s$	0.0s	0
P06. 13	STOP DC braking current	0% ~ 100%	0%	0
P06. 14	STOP DC braking time	$0.0s \sim 100.0s$	0.0s	0
P06. 15	Braking usage rate	0% ~ 100%	100%	0
P06. 18	Current size of rotational speed tracking	30% ~ 200%	Depend on inverter	0
P06. 21	Demagnetization time(Valid for SVC)	0.00 ∼ 5.00s	Depend on inverter	
P06. 22	Minimum output frequency	0.00 ∼ P06.11	0.00	0
P06. 23	Overexcitation selection	O:Invalid 1:Only valid for deceleration 2:Valid all the time	0	0
P06. 24	Overexcitation inhibited current value	0 ~ 150%	100%	0
P06. 25	Overexcitation gain	1.00 ~ 2.50	1.25	0

Group PO7: Auxiliary function

Code	Description	Setting range	Default	Property
P07. 00	JOG running frequency	0.00Hz ~ maximum frequency	2.00Hz	0
P07. 01	JOG acceleration time	0.0s ~ 6500.0s	20.0s	0
P07. 02	JOG deceleration time	0.0s ~ 6500.0s	20.0s	0
P07. 03	Acceleration time 2	0.0s ~ 6500.0s	Depend on inverter	0
P07. 04	Deceleration time 2	0.0s ~ 6500.0s	Depend on inverter	0
P07. 05	Acceleration time 3	0.0s ~ 6500.0s	Depend on inverter	0
P07.06	Deceleration time 3	0.0s ~ 6500.0s	Depend on inverter	0
P07.07	Acceleration time 4	$0.0s \sim 6500.0s$	0.0s	0
P07. 08	Deceleration time 4	$0.0s \sim 6500.0s$	0.0s	0
P07. 09	Jump frequency 1	0.00Hz \sim maximum frequency	0.00Hz	0
P07. 10	Jump frequency 2	0.00Hz \sim maximum frequency	0.00Hz	0
P07.11	Jump frequency amplitude	0.00Hz \sim maximum frequency	0.00Hz	0
P07. 12	FWD/REV dead zone time	0.0s ~ 3000.0s	0.0s	0
P07. 13	Reverse frequency prohibited	0:Invalid 1:Valid	0	0
P07. 14	Setting frequency under lower limit frequency running mode	0:Follow lower limit frequency 1:Stop 2:Zero-speed running	0	0
P07. 15	Droop rate	0.00% ~ 10.00%	0.00%	0
P07. 16	Set accumulated power- on arrival time	0h ~ 65000h	0h	0
P07. 17	Set accumulated running arrival time	0h ~ 65000h	0h	0
P07. 18	Starting protection selection	0:Don't protect 1:Protect	0	0
P07. 19	Frequency detection value 1(FDT1)	0.00Hz \sim maximum frequency	50.00Hz	0
P07. 20	Frequency detection hysteresis rate 1	0.0% \sim 100.0% (FDT1 electrical level)	5.0%	0
P07. 21	Frequency arrival detection amplitude	0.0% \sim 100.0% (Maximum frequency)	0.0%	0
P07. 22	Jump frequency whether valid during acceleration and deceleration	0:Invalid 1:Valid	0	0
P07. 25	Switching frequency point between acceleration time 1 and acceleration 2	0.00Hz \sim maximum frequency	0.00Hz	0

PO7. 26 Switching frequency point land deceleration time and deceleration time and deceleration 2 time 2 (CDT2) and 2 (CDT2) are according to 2 (CDT2) and 3 (CDT2) are according to 3					
P07. 28 Frequency detection value 0.00Hz	P07. 26	Switching frequency point between deceleration time 1 and deceleration 2	0.00Hz \sim maximum frequency	0.00Hz	0
P07. 29 Frequency detection 0.0% ~ 100.0% (FDT2 electrical 5.0% 0 P07. 30 Random arrival frequency 0.00Hz ~ maximum frequency 50.00Hz 0 P07. 31 Random arrival frequency 0.0% ~ 100.0% (maximum 0.0% 0 P07. 32 Random arrival frequency 0.0% ~ 100.0% (maximum 0.0% 0 P07. 33 Random arrival frequency 0.0% ~ 100.0% (maximum 0.0% 0 P07. 34 Zero current detection 0.0% ~ 300.0% (100.0% 0 P07. 35 Zero current detection 0.0% ~ 300.0% (100.0% 0 P07. 36 Output current ultralimit 0.0% ~ 600.00s 0.10s 0 P07. 37 Output current ultralimit 0.0% ~ 300.0% (Motor rated 200.0% 0 P07. 38 Random arrival current 0.0% ~ 300.0% (Motor rated 200.0% 0 P07. 39 Random arrival current 0.0% ~ 300.0% (Motor rated 0.0% 0 P07. 39 Random arrival current 0.0% ~ 300.0% (Motor rated 0.0% 0 P07. 40 Random arrival current 0.0% ~ 300.0% (Motor rated 0.0% 0 P07. 41 Random arrival current 0.0% ~ 300.0% (Motor rated 0.0% 0 P07. 42 Timing function selection 0.1% ~ 300.0% (Motor rated 0.0% 0 P07. 43 Timing running time 0.0% ~ 300.0% (Motor rated 0.0% 0 P07. 44 Timing running time 0.0% ~ 300.0% (Motor rated 0.0% 0 P07. 45 All input voltage protection 0.00% ~ P07. 46 3.10% 0 P07. 46 All input voltage protection 0.00% ~ P07. 46 3.10% 0 P07. 47 Module temperature 0.0% ~ 10.0% 0 P07. 48 Cooling fan control 0.5% arrival on the requency (F8-51) ~ 0 P07. 49 Awakening frequency Sleeping frequency (F8-51) ~ 0 P07. 49 Awakening frequency Sleeping frequency (F8-51) ~ 0 P07. 49 Awakening frequency Sleeping frequency (F8-51) ~ 0 P07. 49 Awakening frequency Sleeping frequency (F8-51) ~ 0 P07. 49 Awakening frequency Sleeping frequency (F8-51) ~ 0 P07. 40 Awakening frequency Sleeping frequency (F8-51) ~ 0 P07. 40 Awakening frequency Sleeping frequency (F8-51) ~ 0 P07. 40 Awakening	P07. 27		0:Invalid 1:Valid	0	0
PO7. 30 Random arrival frequency detection value 1 PO7. 31 Random arrival frequency detection value 1 PO7. 32 Random arrival frequency detection value 2 PO7. 33 Random arrival frequency 0.00Hz ~ maximum frequency 50.00Hz 0 PO7. 34 Random arrival frequency 0.00Hz ~ maximum frequency 50.00Hz 0 PO7. 35 Random arrival frequency frequency 0.00% (maximum frequency 50.00Hz 0 PO7. 36 Random arrival frequency frequency 0.00% (maximum frequency 50.00Hz 0 PO7. 37 Random arrival frequency frequency frequency 0.00% 0.00% (maximum frequency 50.00Hz 0 PO7. 36 Random arrival frequency frequency frequency 0.00% 0.	P07. 28	Frequency detection value 2(FDT2)	0.00Hz \sim maximum frequency	50.00Hz	0
PO7. 31 Random arrival frequency cetection walue 1	P07. 29	Frequency detection hysteresis rate 2		5.0%	0
PO7. 31 detection amplitude 1 frequency 0.0% 0.0% 0.0% 0.0% 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.0% 0.	P07. 30	Random arrival frequency detection value l	0.00Hz ~ maximum frequency	50.00Hz	0
P07. 32 detection value 2 P07. 33 Random arrival current P07. 34 Random arrival current P07. 35 Random arrival current P07. 36 Random arrival current P07. 37 Random arrival current P07. 38 Random arrival current P07. 39 Random arrival current P07. 40 Random arrival current P07. 41 Random arrival current P07. 42 Timing running time P07. 43 Timing running time Random arrival time P07. 44 Timing running time P07. 45 AII input voltage protection P07. 46 AII input voltage protection P07. 47 Random arrival temperature P07. 48 Cooling fan control P07. 49 Awakening frequency Scepting frequency (F0-10) P07. 49 Random fan control P07. 49 Random fan control P07. 49 Random fan control P07. 40 Random arrival current P07. 41 Random arrival current P07. 42 Random arrival current P07. 43 Random arrival current P07. 44 Random arrival current P07. 45 P07. 46 P07. 47 Random arrival current P07. 48 P07. 49 Random arrival current P07. 45 P07. 46 P07. 47 Random arrival current P07. 48 P07. 49 Random arrival current P07. 40 Random arrival	P07. 31	Random arrival frequency detection amplitude l		0.0%	0
P07. 35 detection amplitude 2 frequency 0.0% 0.0	P07. 32	Random arrival frequency detection value 2	0.00Hz ~ maximum frequency	50.00Hz	0
P07. 34 Gero current detection corresponding to motor rated curren	P07. 33	Random arrival frequency detection amplitude 2		0.0%	0
P07. 36 Continue C	P07. 34	Zero current detection level	corresponding to motor rated	5.0%	0
P07. 36 Value current ultralimit of current) P07. 37 Output current ultralimit detection delay time P07. 38 Random arrival current 1 0.0% ~ 300.0% (Motor rated current)) P07. 39 Random arrival current 1 0.0% ~ 300.0% (Motor rated current)) P07. 40 Random arrival current 2 0.0% ~ 300.0% (Motor rated current) P07. 41 Random arrival current 2 0.0% ~ 300.0% (Motor rated current) P07. 42 Timing function selection P07. 43 Timing running time selection P07. 44 Timing running time P07. 45 All input voltage protection value upper limit P07. 46 All input voltage protection value upper limit P07. 47 Module temperature of current protection of control of current protection protection of current protection protection protection protection of current protection protection protection protection of current protection p	P07. 35		0.01s ~ 600.00s	0.10s	0
PO7. 37 detection delay time PO7. 38 Random arrival current 1 PO7. 39 Random arrival current 1 PO7. 40 Random arrival current 2 PO7. 40 Random arrival current 2 PO7. 41 Random arrival current 2 PO7. 42 Timing function selection PO7. 43 Timing running time Selection PO7. 44 Timing running time PO7. 45 All input voltage protection PO7. 46 All input voltage protection PO7. 47 Module temperature PO7. 48 Cooling fan control PO7. 49 Awakening frequency PO7. 49 Awakening frequency PO7. 49 Awakening frequency PO7. 49 Awakening frequency PO7. 49 Random arrival current 1 PO. 0.0% ~ 300.0% (Motor rated current) PO7. 41 Random arrival current 2 PO. 0.0% ~ 300.0% (Motor rated current) PO7. 44 Timing function selection PO7. 44 Timing running time PO7. 44 Timing running time PO7. 45 All input voltage protection PO7. 46 All input voltage protection PO7. 47 Module temperature PO7. 48 Cooling fan control PO7. 49 Awakening frequency PO7. 40 O.0% ~ 300.0% (Motor rated current) PO.0% ~ 300.0% (Motor rated curre	P07. 36	Output current ultralimit value	0.1% ∼ 300.0% (Motor rated	200.0%	0
PO7. 39 Random arrival current 1	P07. 37		0.00s ~ 600.00s	0.00s	0
PO7. 40 Random arrival current 2 0.0% ~ 300.0% (Motor rated current) 100.0% 0 PO7. 41 Random arrival current 2 0.0% ~ 300.0% (Motor rated current) 0.0% 0 PO7. 42 Timing function selection 0: Invalid 1: Valid 0 0 PO7. 43 Timing running time selection 0: Set by PO7. 44 1: All 2: All 2 3: All 3 Analog input range corresponding to PO7. 44 Timing running time 0.0H ~ 6500.0H 0.0H 0 PO7. 45 All input voltage protection value upper limit 0.00V ~ PO7. 46 All input voltage protection value upper limit 0.00V ~ PO7. 45 Module temperature 0.00V ~ 10.00V 6.80V 0 PO7. 47 Module temperature 0.00 0.00V ~ 10.00V 7.5°C 0 PO7. 48 Cooling fan control 0.5 Fan rotation when running 1.5 Fan rotation all the time 0.00H 0.00	P07. 38	Random arrival current 1	0.0% ~ 300.0%(Motor rated current))	100.0%	0
P07. 41 Random arrival current 2	P07. 39		0.0% \sim 300.0% (Motor rated current)	0.0%	0
PO7. 41 Amplitude current) PO7. 42 Timing function selection O: Invalid 1: Valid 0 O: Set by PO7. 44 I: AII Selection O: Set by PO7. 44 O: Set by PO7. 44 I: AII Selection O: Set by PO7. 44 O: Set by PO7. 44 O: Set by PO7. 44 I: AII Selection O: Set by PO7. 44 O: Set by PO7. 44 O: Set by PO7. 44 I: AII O: Set by PO7. 44 O: Set by PO7. 44 O: Set by PO7. 44 I: AII O: Set by PO7. 44 O: Set by PO7. 44 I: AII O: Set by PO7. 44 O: O' Set by PO7. 44 O' Set by PO7.	P07. 40	Random arrival current 2	0.0% \sim 300.0%(Motor rated current)	100.0%	0
P07. 43 Timing running time selection $\begin{array}{c} 0: \text{Set by P07. } 44 \\ 1: \text{AII} \\ 2: \text{AI2} \\ 3: \text{AI3} \\ \text{Analog input range corresponding to P07. } 44 \\ \hline \text{P07. 44 Timing running time} \\ \text{P07. 45 AII input voltage protection} \\ \text{P07. 45 AII input voltage protection} \\ \text{P07. 46 AII input voltage protection} \\ \text{P07. 46 AII input voltage protection} \\ \text{P07. 47 Module temperature} \\ \text{P07. 47 arrival} \\ \text{P07. 48 Cooling fan control} \\ \text{P07. 48 Cooling fan control} \\ \text{P07. 49 Awakening frequency} \\ \text{Sleeping frequency} (F8-51) \\ \text{maximum frequency} (F0-10) \\ \text{O. 00Hz} \\ O.$	P07. 41	Random arrival current 2 Amplitude		0.0%	0
P07. 43 Timing running time $\begin{array}{c} 1:A11\\2:A12\\3:A13\\Analog input range\\corresponding to P07. 44 \end{array}$ P07. 44 Timing running time $\begin{array}{c} 0.0H \sim 6500.0H \\0.0H \sim 6500.0H \\0.0H \sim 6500.0H \end{array}$ 0. 0H P07. 45 All input voltage protection $\begin{array}{c} 0.0V \sim P07.46 \\0.0V \sim P07.46 \\0.0V \sim P07.46 \end{array}$ 3. 10V P07. 46 All input voltage protection $\begin{array}{c} 0.0V \sim P07.46 \\0.0V \sim P07.46 \\0.0V \sim P07.47 \\0.0V \sim P07.47 \\0.0V \sim P07.47 \\0.0V \sim P07.47 \\0.0V \sim P07.48 \\0.0V \sim P07.48 \\0.0V \sim P07.48 \\0.0V \sim P07.49 \\0$	P07. 42	Timing function selection	0:Invalid 1:Valid	0	0
P07. 45 All input voltage protection 0.00V \sim P07. 46 3.10V 0 P07. 46 All input voltage protection P07. 45 \sim 10.00V 6.80V 0 P07. 47 Module temperature 0° \sim 100°C 75°C 0 P07. 48 Cooling fan control 0:Fan rotation when running 1:Fan rotation all the time 0 P07. 49 Awakening frequency Sleeping frequency (F8-51) \sim 0.00Hz 0	P07. 43	Timing running time selection	1:AI1 2:AI2 3:AI3 Analog input range	0	0
PO7. 46 All input voltage protection value upper limit PO7. 47 Module temperature arrival PO7. 48 Cooling fan control PO7. 49 Awakening frequency Sleeping frequency (F8-51) ~ 0.00Hz	P07. 44	Timing running time	0. OH ∼ 6500. OH	0.0H	0
PO7. 47 Module temperature or 100°C or	P07. 45	All input voltage protection value lower limit	0.00V ∼ P07.46	3.10V	0
P07. 48 Cooling fan control 0:Fan rotation when running 1:Fan rotation all the time 0 0 P07. 49 Awakening frequency Sleeping frequency(F8-51) ~ 0.00Hz 0	P07. 46	AI1 input voltage protection value upper limit	P07.45 ~ 10.00V	6.80V	0
P07. 49 Awakening frequency Sleeping frequency(F8-51) ~ 0.00Hz	P07. 47	Module temperature arrival	0℃~ 100℃	75℃	0
maximum frequency(F0-10)	P07. 48	Cooling fan control	0:Fan rotation when running 1:Fan rotation all the time	0	0
P07.50 Awakening delay time $0.0s \sim 6500.0s$ 0.0s 0	P07. 49	Awakening frequency	Sleeping frequency(F8-51) \sim maximum frequency(F0-10)	0.00Hz	0
	P07. 50	Awakening delay time	0.0s ~ 6500.0s	0.0s	0

P07. 51	Sleeping frequency	0.00Hz ∼ awakening frequency (P07.49)	0.00Hz	0
P07. 52	Sleeping delay time	0.0s ∼ 6500.0s	0.0s	0
P07. 53	Running arrival time of this time	0.0 ∼ 6500.0H	0. OH	0
P07. 54	Output power correction coefficient	0.00% ~ 200.0%	100.0%	0
P07. 57	Current correction coefficient	95% ~ 100.0%	100.0%	0

Group PO8: Communication parameters

Code	Description	Setting range	Default	Property
P08. 00	Communication baud rate	Ones place: MODBUS 0: 300bps 1: 600bps 2: 1200bps 3: 2400bps 4: 4800bps 6: 19200bps 6: 19200bps 7: 38400bps 8: 57600bps 9: 115200bps Tens place: reserved Thousands place: reserved	5005	0
P08. 01	MODBUS data format	0: No parity (8-N-2) 1: Even parity (8-E-1) 2: Odd parity (8-0-1) 3: No parity (8-N-1)	3	0
P08. 02	local address	0: broadcast address 1 ~ 247 (MODBUS valid)	1	0
P08.03	MODBUS response delay	$0\sim 20 \mathrm{ms}$ (MODBUS valid)	2	0
P08.04	Timeout period for serial port communication	0.0: invalid 0.1 ~ 60.0s	0.0	0
P08. 05	MODBU Communication data format	Ones place: MODBUS O: Non-standard MODBUS protocol I: Standard MODBUS protocol Tens place: reserved	31	0
P08.06	Communication reading current resolution	0: 0.01A(valid when ≤ 55KW) 1: 0.1A	0	0
P08. 07	Master slave communication mode	0: Local machine as slave 1: Local machine as host	0	0
P08. 08	The host communicates to send data	0: Set frequency (P13.00) 1: Output frequency (P13.01)	1	0

Group PO9: PID function

Code	Description	Setting range	Default	Property
P09. 00	PID given source	0: P09.01 setting 1: A11 2: A12 3: Potentiometer 4: Reserved 5: Communication given 6: Multi-segment instruction given	0	0
P09.01	PID value given	0.0% ~ 100.0%	50.0%	0

P09. 02	PID feedback source	0: AI1 1: AI2 2: Potentiometer 3: AII-AI2 4: Reserved 5: Communication given 6: AII+AI2 7: MAX(IAII), AI2) 8: MIN(AII , AI2)	0	0
P09. 03	PID action direction	0: Positive action 1: Reverse action	0	0
P09.04	PID gives feedback range	$0 \sim 65535$	1000	0
P09. 05	Proportional gain KP1	0.0 ~ 1000.0	20.0	0
P09.06	The integration time is TI1	$0.01s \sim 10.00s$	2.00s	0
P09.07	Differentiate the time TD1	$0.000s \sim 10.000s$	0.000s	0
P09.08	PID reversal cutoff frequency	0.00 \sim Maximum frequency	0.00Hz	0
P09.09	PID deviation limit	0.0% ~ 100.0%	0.0%	0
P09. 10	PID differential limit	0.00% ~ 100.00%	0.10%	0
P09.11	PID specifies the change time	$0.00 \sim 650.00s$	0.00s	0
P09. 12	PID feedback filtering time	0.00 ~ 60.00s	0.00s	0
P09. 13	PID Output filtering time	0.00 ~ 60.00s	0.00s	0
P09. 15	Proportional gain KP2	0.0 ~ 1000.0	20.0	0
P09. 16	The integration time is TI2	0.01s ~ 10.00s	2.00s	0
P09. 17	Differentiate the time TD2	0.000s ~ 10.000s	0.000s	0
P09. 18	PID parameter switching condition	O: do not switch I: Switch through DI terminal 2: Automatically switch according to the deviation 3: Automatically switch according to the operating frequency	0	0
P09. 19	PID parameter switching deviation 1	0.0% ∼ P09.20	20.0%	0
P09. 20	PID parameter switching deviation 2	P09.19 ~ 100.0%	80.0%	0
P09. 21	PID initial value	0.0% ~ 100.0%	0.0%	0
P09. 22	PID initial value hold time	0.00 ∼ 650.00s	0.00s	0
P09. 23	The positive maximum value of two output deviations	0.00% ~ 100.00%	1.00%	0
P09. 24	Two output deviations reverse maximum value	0.00% ~ 100.00%	1.00%	0
P09. 25	PID integral attribute	Ones place: Integral separation 0: invalid 1: Valid 1: Valid 1: Valid Tens place: whether to stop the integration after the output reaches the limit value 0: Continue points 1: Stop integration	00	0

P09. 26	PID feedback loss detection value	0.0%: Not judged feedback loss 0.1% \sim 100.0%	0.0%	0
P09. 27	PID feedback loss detection time	$0.0s \sim 20.0s$	0.0s	0
P09. 28	PID shutdown operation	0: Stop and do not operate 1: Compute at stop	0	0

Group P10: Multi-section Instruction, Simple PLC Function

Code	Description	Setting range	Default	Property
P10.00	Multistage instruction 0	$-100.0\% \sim 100.0\%$	0.0%	0
P10.01	Multistage instruction 1	-100.0% ~ 100.0%	0.0%	0
P10.02	Multistage instruction 2	-100.0% ~ 100.0%	0.0%	0
P10.03	Multistage instruction 3	-100.0% ~ 100.0%	0.0%	0
P10.04	Multistage instruction 4	-100.0% ~ 100.0%	0.0%	0
P10.05	Multistage instruction 5	−100.0% ~ 100.0%	0.0%	0
P10.06	Multistage instruction 6	-100.0% ~ 100.0%	0.0%	0
P10.07	Multistage instruction 7	-100.0% ~ 100.0%	0.0%	0
P10.08	Multistage instruction 8	-100.0% ~ 100.0%	0.0%	0
P10.09	Multistage instruction 9	-100.0% ~ 100.0%	0.0%	0
P10.10	Multistage instruction 10	-100.0% ~ 100.0%	0.0%	0
P10.11	Multistage instruction 11	-100.0% ~ 100.0%	0.0%	0
P10. 12	Multistage instruction 12	-100.0% ~ 100.0%	0.0%	0
P10. 13	Multistage instruction 13	-100.0% ~ 100.0%	0.0%	0
P10.14	Multistage instruction 14	-100.0% ~ 100.0%	0.0%	0
P10. 15	Multistage instruction 15	−100.0% ~ 100.0%	0.0%	0
P10. 16	Simple PLC operation mode	O: Stop at the end of a single run 1: Keep the final value at the end of a single run 2: keep circulating	0	0
P10. 17	Simple PLC power down memory selection	Ones place:Power-off memory selection 0: No memory after power-off l: Memory after power-off Tens place: Stop memory selection 0: No memory after stop l: Memory after stop	00	0
P10. 18	Simple PLC Running time of step 0	$0.0s(h) \sim 6500.0s(h)$	0.0s(h)	0
P10. 19	Simple PLC step 0 acceleration/ deceleration time selection	$0 \sim 3$	0	0
P10. 20	Simple PLC Running time of step 1	$0.0s(h) \sim 6500.0s(h)$	0.0s(h)	0
P10. 21	Simple PLC step 1 acceleration and deceleration time selection	0 ~ 3	0	0
P10. 22	Simple PLC Running time of step 2	$0.0s(h) \sim 6500.0s(h)$	0.0s(h)	0

P10. 23 $\begin{array}{c} \text{Simple PLC step 2} \\ \text{acceleration time selection} \\ \text{O} \\ \text{O} \\ \text{Simple PLC Running time} \\ \text{O} \\ \text{Os(h)} \sim 6500.0 \\ \text{S(h)} \\ \text{O} \\ \text{Os(h)} \\ \text{O} \\ \text{Os(h)} \\ \text{O} \\ \text$		la, i ma a i i			1
P10. 25 Simple PLC Running time of step 4 acceleration and deceleration time selection of step 4 acceleration of step 4 acceleration of step 4 acceleration on time selection	P10. 23	Simple PLC step 2 acceleration and deceleration time selection	$0 \sim 3$	0	0
P10. 26 Simple PLC Running time of step 4 acceleration and deceleration time selection of step 4 acceleration and deceleration time selection of step 5 acceleration of step 5 acceleration of step 6 acceleration of step 6 acceleration of step 6 acceleration of step 7 acceleration of step 8 acceleration of step 9 acceler	P10. 24	Simple PLC Running time of step 3	$0.0s(h) \sim 6500.0s(h)$	0.0s(h)	0
P10. 27 Simple PLC step 4 acceleration and deceleration time selection $0 \sim 3$ $0 \circ 0$ P10. 28 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h)$ $0.0s(h)$ P10. 29 Simple PLC step 5 acceleration and deceleration time selection $0 \sim 3$ $0 \circ 0$ P10. 30 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h)$ $0.0s(h)$ P10. 31 Simple PLC step 6 acceleration and deceleration time selection $0 \sim 3$ $0 \circ 0$ P10. 32 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h)$ $0.0s(h)$ P10. 33 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h)$ $0.0s(h)$ P10. 34 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h)$ $0.0s(h)$ P10. 35 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h)$ $0.0s(h)$ P10. 36 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h)$ $0.0s(h)$ P10. 37 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h)$ $0.0s(h)$ P10. 38 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h)$ $0.0s(h)$ P10. 38 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h)$ $0.0s(h)$ P10. 39 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h)$ $0.0s(h)$	P10. 25	Simple PLC step 3 acceleration and deceleration time selection	$0 \sim 3$	0	0
P10. 28 Simple PLC Running time of step 5 acceleration and deceleration time selection of step 5 acceleration and deceleration time selection of step 6 acceleration and deceleration time selection of step 6 acceleration and deceleration time selection of step 6 acceleration of step 6 acceleration of step 7 acceleration of step 8 acceleration of step 9 acceleration of step 10 acceleration of step 10 acceleration of step 9 accelerati	P10. 26		$0.0s(h) \sim 6500.0s(h)$	0.0s(h)	0
P10. 29 Simple PLC step 5 acceleration of step 5 acceleration of step 6 acceleration time selection of step 6 acceleration time selection of step 7 acceleration of step 7 acceleration of step 8 acceleration of step 8 acceleration of step 8 acceleration of step 8 acceleration of step 9 acceleration of step 10 acce	P10. 27	Simple PLC step 4 acceleration and deceleration time selection	$0 \sim 3$	0	0
P10. 30 Simple PLC Running time of step 6 Running time of step 7 Running time of step 8 Running time of step 9 Running time of step 10 Running time of step 10 Running time on Stimple PLC Step 10 Running time Stimple PLC Step 10 Running time Stimple PLC Step 10 Running S	P10. 28	Simple PLC Running time of step 5	$0.0s(h) \sim 6500.0s(h)$	0.0s(h)	0
P10. 31 Simple PLC step 6 acceleration and deceleration time selection $0 \sim 3$ $0 \circ 0$ P10. 32 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h) \circ 0.0s(h)$ P10. 33 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h) \circ 0.0s(h)$ P10. 34 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h) \circ 0.0s(h)$ P10. 35 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h) \circ 0.0s(h)$ P10. 36 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h) \circ 0.0s(h)$ P10. 37 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h) \circ 0.0s(h)$ P10. 38 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h) \circ 0.0s(h)$ P10. 39 Simple PLC Running time $0.0s(h) \sim 6500.0s(h)$ $0.0s(h) \circ 0.0s(h)$	P10. 29	Simple PLC step 5 acceleration and deceleration time selection	$0 \sim 3$	0	0
P10. 32 Simple PLC Running time of step 7 acceleration and deceleration time selection of step 8 Companies and deceleration time selection of step 8 acceleration and deceleration time selection of step 8 acceleration of step 8 acceleration of step 9 Companies selection of step 9 acceleration of step 10 acc	P10. 30	Simple PLC Running time of step 6	$0.0s(h) \sim 6500.0s(h)$	0.0s(h)	0
P10. 33 Simple PLC step 7 acceleration and deceleration time selection $0 \sim 3$ $0 \odot 100$ Os (h) Os (h) $0 \odot 100$ Os (h)	P10. 31	Simple PLC step 6 acceleration and deceleration time selection	0~3	0	0
P10. 34 Simple PLC Running time of step 8 acceleration of step 9 acceleration of step 9 of step 9 acceleration of step 9 of step 9 acceleration of step 10 occeleration of step 10 occeleration of step 10 occeleration of occileration of occileration of occileration of occileration of occileration of occileration oc	P10. 32	Simple PLC Running time of step 7	$0.0s(h) \sim 6500.0s(h)$	0.0s(h)	0
P10. 35 Simple PLC step 8 acceleration on $0 \sim 3$ on	P10. 33		$0 \sim 3$	0	0
P10. 36 Simple PLC Running time of step 9 acceleration of $0.0s(h) \sim 6500.0s(h)$ 0. 0s(h) 0.	P10. 34	Simple PLC Running time of step 8	$0.0s(h) \sim 6500.0s(h)$	0.0s(h)	0
P10. 37 Simple PLC step 9 acceleration and deceleration time selection $0 \sim 3$ $0 \circ 0$ P10. 38 Simple PLC Running time $0 \circ 0 \circ 0$ O P10. 39 Simple PLC step 10 acceleration $0 \sim 3$ $0 \circ 0 \circ 0$ Simple PLC step 10 acceleration $0 \sim 3$ $0 \circ 0 \circ 0$ O P10. 39 Simple PLC step 10 acceleration $0 \sim 3 \circ 0 \circ 0$	P10. 35	Simple PLC step 8 acceleration and deceleration time selection	$0 \sim 3$	0	0
P10. 38 Simple PLC Running time 0. 0s (h) \sim 6500. 0s (h) 0. 0s (h) \sim P10. 39 Simple PLC step 10 acceleration and deceleration time selection 0 \sim 3 0	P10. 36	Simple PLC Running time of step 9	$0.0s(h) \sim 6500.0s(h)$	0.0s(h)	0
P10. 39 Simple PLC step 10 acceleration and deceleration time selection $0 \sim 3$	P10. 37	Simple PLC step 9 acceleration and deceleration time selection	$0 \sim 3$	0	0
and deceleration time selection	P10. 38	Simple PLC Running time of step 10	$0.0s(h) \sim 6500.0s(h)$	0.0s(h)	0
P10 40 Simple PLC Running time 0.0s(h) \sim 6500.0s(h) 0.0s(h)	P10. 39	Simple PLC step 10 acceleration and deceleration time selection	$0 \sim 3$	0	0
of step 11 (0.03 (h) 0000.03 (h) (0.03 (h)	P10. 40	Simple PLC Running time of step 11	$0.0s(h) \sim 6500.0s(h)$	0.0s(h)	0
P10. 41 Simple PLC step II acceleration and deceleration time selection $0\sim 3$	P10. 41	Simple PLC step 11 acceleration and deceleration time selection	$0 \sim 3$	0	0
P10. 42 Simple PLC Running time 0.0s(h) \sim 6500.0s(h) 0.0s(h) \sim	P10. 42	Simple PLC Running time of step 12	$0.0s(h) \sim 6500.0s(h)$	0.0s(h)	0
P10. 43 Simple PLC step 12 acceleration and deceleration time selection $0\sim3$	P10. 43	Simple PLC step 12 acceleration and deceleration time selection	0~3	0	0
P10. 44 Simple PLC Running time 0.0s(h) \sim 6500.0s(h) 0.0s(h) 0.0s(h)	P10. 44	Simple PLC Running time of step 13	$0.0s(h) \sim 6500.0s(h)$	0.0s(h)	0
P10.45 Simple PLC step 13 acceleration and deceleration time selection $0\sim3$	P10. 45	Simple PLC step 13 acceleration and deceleration time selection	0~3	0	0
P10. 46 Simple PLC Running time 0.0s(h) \sim 6500.0s(h) 0.0s(h) 0.0s(h)	P10. 46	Simple PLC Running time of step 14	$0.0s(h) \sim 6500.0s(h)$	0.0s(h)	0
P10. 47 Simple PLC step 14 acceleration 0 ~ 3	P10. 47	Simple PLC step 14 acceleration and deceleration time selection	$0 \sim 3$	0	0

P10. 48	Simple PLC Running time of step 15	$0.0s(h) \sim 6500.0s(h)$	0.0s(h)	0
P10. 49	Simple PLC step 15 acceleration and deceleration time selection	$0 \sim 3$	0	0
P10. 50	Simple PLC runtime unit	0: s (second) 1: h (hour)	0	0
P10. 51	Multi-step instruction O given mode	0: Function code P10.00 is given 1: All 2: Al2 3: Al3 4: Impulsion 5: PID 6: Preset frequency (P00.08) Given, UP/DOWN can be modified	0	0

Group P11: Fault and Protection

Code	Description	Setting range	Default	Property
P11.00	Motor overload protection option	0: forbid 1: allow	0	0
P11.01	Motor overload protection gain	$0.20 \sim 10.00$	1.00	0
P11.02	Motor overload warning coefficient	50% ~ 100%	80%	0
	Over pressure stall gain	$0 \sim 100$	30	0
P11.04	Over voltage stall protection voltage	650V ~ 800V	770V	0
P11.07	Short circuit protection option to ground	O: invalid 1: valid Ones place: selected for short circuit protection to ground during power-on lens place: selected for short circuit protection to ground before running	0	0
P11.08	Starting electricity for braking unit action pressure	$330.0 \sim 800.0$	760V	X
P11.09	Failure during automatic fault reset	$0 \sim 20$	0	0
	DO action selection	0: No action 1: Action	0	0
P11.11	Fault automatic reset waiting time	$0.1s \sim 100.0s$	1.0s	0
P11. 12	Input phase loss / contactor latch protection option	Ones place: Input phase loss protection option O: Prohibit input missing protection 1: at the same time to meet the software and hardware input phase loss protection 2: as long as the software input phase loss are met when protection 3: as long as the hardware input phase loss are met when protection Tens place: contactor latch protection option O: forbid 1: allow	00	0

P11. 13	Output phase loss protection option	Ones place: output phase loss protection option Tens place: output phase loss protection option before running O: forbid 1: allow	01	0
P11.14	Fault protection action Select 1	Ones place:Motor overload 0: free stop 1: stop according to stop mode 2: keep running Tens place: input phase loss Hundreds place: output phase loss Thousands place: External fault Ten thousand place: abnormal communication	00000	X
P11. 15	Fault protection action 2	Ones place: Encoder/PG card abnormal 0: Free stop Tens place: abnormal reading and writing of function code 0: Free stop 1: stop according to the stop mode Hundreds place: Inverter overload fault action selection 0: Free stop 1: stop according to the stop mode 2: berating operation (only for air compressors) Thousands place: Motor overheated Ten thousand place: the running time arrives	00000	X
P11. 16	Fault protection action 3	Ones place: user-defined fault 1 0: Free stop 1: stop according to the stop mode 2: keep running Tens place: User-defined fault 2 0: Free stop 1: stop according to the stop mode 2: keep running 1: stop according to the stop mode 2: keep running 1: stop according to the stop mode 2: keep running 1: stop according to the stop mode 2: keep running Ihousands place: drop load 0: Free stop 1: Decelerate to stop 2: Skip directly to 7% of motor rated frequency to continue Running, it will automatically return to the set frequency operation when the load is not dropped Ten thousand place: PID feedback lost during running 0: Free stop 1: stop according to the stop mode 2: keep running	00000	X
P11. 17	Fault protection action 4	Ones place: Speed deviation is too large 0: Free stop 1: stop according to the stop mode 2: keep running Tens place: Motor overspeed Hundreds place: wrong initial position	00000	X
P11.21	Continue to run frequency selection in case of failure	0: run at the current operating frequency 1: run at the set frequency 2: run at the upper limit frequency 3: Run at the lower limit frequency 4: Running at abnormal backup frequency	0	0
P11. 22	Abnormal backup frequency	0.0% \sim 100.0%(100.0% corresponds to the maximum frequency P00.14)	100.0%	0

P11.23	Motor temperature sensor type	0: No temperature sensor 1: PT100 2: PT1000	0	0
P11.24	Motor overheat protection threshold	0°C∼ 200°C	110℃	0
P11.25	Motor overheat alarm threshold	0°C∼ 200°C	90℃	0
P11. 26	Instantaneous stop non-stop function selection	O is invalid I Bus voltage constant control 2 Deceleration to stop	$^{\circ}$	0
P11.27	Instantaneous power failure and non-stop recovery of voltage	80% ~ 100%	85%	0
P11. 28	Instantaneous power failure and non-stop voltage recovery judgment time	0.0 ∼ 100.0s	0.5s	0
P11.29	Instantaneous stop and non-stop action voltage	60% ~ 100%	80%	0
P11.30	Drop load protection option	0: invalid 1: Valid	0	0
P11.31	Load drop detection level	$0.0 \sim 100.0\%$	10.0%	0
P11.32	Load drop detection time	$0.0 \sim 60.0s$	1.0s	0
P11. 34	Overspeed detection value	0.0%~ 50.0% (maximum frequency)	20.0%	0
P11.35	Overspeed detection time	0.0s: no detection 0.01 ~ 0.600s	1.0s	0
P11.36	The speed deviation is too large	0.0%~ 50.0% (maximum frequency)	20.0%	0
P11.37	Excessive speed deviation detection time	0.0s: no detection 0.1 ~ 60.0s	5. 0x	0
P11.38	Instantaneous stop non-stop gain Kp	0-100	40	0
P11. 39	Momentary stop and non-stop integral coefficient Ki	0-100	30	0
P11.40	Instantaneous stop non-stop action deceleration time	0-300.0s	20. 0s	0
P11.41	UVW encoder fault (Err20) Enable	0, 1	1	0
P11. 42	Fault protection action selection	Ones place: initial position angle identification failure Tens place: Load tuning fault O: continue running 1: Free stop	11	0

Group P12: Keyboard and display

Code	Description	Setting range	Default	Property
P12.00	Digital tube missing picture inspection enable	$0 \sim 1$	0	X

P12. 01	MF.K key function selection	O: MF.K is invalid 1: The operation panel command channel communicates with the remote command channel (terminal command channel) or communication command channel) toggle 2: Forward and reverse switching 3: Forward jog 4: Reverse jog	0	0
P12.02	The STOP/RESET button function	O: Only in keyboard operation mode, the stop function of STOP/RES key is valid I: In any operation mode, the stop function of the STOP/RES key is valid	1	0
P12. 03	Run display parameter l	0000 ~ FFFF Bit00: Operating frequency 1(Hz) Bit01: Set frequency (Hz) Bit02: Bus voltage (V) Bit03: Output voltage (Y) Bit03: Output voltage (Y) Bit05: Output power (kW) Bit06: Output torque (%) Bit07: D1 input status Bit08: D0 output status Bit08: D0 output status Bit09: All voltage (V) Bit10: Al2 voltage (V) Bit11: Al3 voltage (V) Bit11: Al3 voltage (V) Bit13: length value Bit13: length value Bit13: Load speed display Bit15: PID setting	1F	0
P12. 04	Run displav parameter 2	0000 to FFFF Bit00: PID feedback Bit01: PIC stage Bit02: PICSE input pulse frequency (kHz) Bit03: Running frequency 2 (Hz) Bit03: Running frequency 2 (Hz) Bit04: Remaining running time Bit05: All voltage before calibration (V) Bit06: Al2 voltage before calibration (W) Bit07: Al3 voltage before calibration (W) Bit08: Linear speed Bit07: Al3 voltage before (Hour) Bit08: Linear speed Bit09: Current power-on time (Hour) Bit10: Current power-on time (Hin) Bit11: PUSE input pulse frequency (Hz) Bit13: Encoder feedback speed (Hz) Bit13: Encoder feedback speed (Hz) Bit14: Main frequency X display (Hz) Bit15: Auxiliary frequency Y display (Hz)	0	0
P12. 05	Stop display parameters	0000 ~ FFFF Bit00: Set frequency (Hz) Bit01: Bus voltage (V) Bit01: Bus voltage (V) Bit02: DI input status Bit03: DO output status Bit03: All voltage (V) Bit05: Al2 voltage (V) Bit06: Al3 voltage (V) Bit06: Al3 voltage (V) Bit06: Al3 voltage (V) Bit07: count value Bit08: length value Bit08: length value Bit09: PLC stage Bit10: Load speed Bit11: PID setting Bit12: PLUSE input pulse frequency (kHz) Bit13: Reserved Bit13: Reserved Bit15: Reserved	33	0
P12.06	Load speed display coefficient		1.0000	0

P12. 07	Inverter module heat sink temperature	-20°C ~ 120°C	-	X
P12. 08	The second line of the keyboard monitors parameters	$0 \sim 30$	4	0
P12. 09	Accumulated running time	0h ∼ 65535h	_	X
P12. 10	product name	_	-	X
P12.11	software version	_	-	X
P12. 12	Load speed shows decimal places	Ones place: the number of decimal points of P13.12 0: 0 decimal places 1: 1 decimal place 2: 2 decimal places 3: 3 decimal places 3: 3 decimal places 1: 1 decimal places 2: 2 decimal place 2: 2 decimal place	21	0
P12. 13	Total power-on time	$0\sim65535~\mathrm{hours}$	-	X
P12. 14	Accumulated power consumption	$0\sim65535~\mathrm{degrees}$	_	X

Group P13 : Basic monitoring parameters

New code	Description	Minimum unit
P13.00	Set frequency (Hz)	0. 01Hz
P13. 01	Operating frequency (Hz)	0. 01Hz
P13. 02	Bus voltage (V)	0. 1V
P13. 03	Output Voltage(V)	0. 1V
P13.04	Current output(A)	0. 01A
P13.05	Output torque (%)	0.1%
P13.06	Output Power(kW)	0.10kW
P13. 07	count value	1
P13.08	length value	1
P13.09	AI1 voltage (V)	0. 01V
P13. 10	AI2 Voltage (V)/Current (mA)	0. 01V/0. 01mA
P13. 11	AI3 voltage (V)	0. 01V
P13. 12	load speed	1RPM
P13. 13	DI Input status	1
P13. 14	DO output status	R2/Y2/R1/Y1
P13. 15	PID setting	1
P13. 16	PID feedback	1
P13. 17	PLC stage	1
P13. 18	Input pulse frequency (Hz)	0.01kHz
P13. 19	Feedback speed (Hz)	0.01Hz

P13. 20	Remaining running time	0. 1H
P13. 21	All voltage before calibration	0. 001V
P13. 22	Voltage (V)/Current (mA) before AI2 calibration	0.001V/0.01mA
P13. 23	AI3 voltage before calibration	0.01V
P13. 24	Motor speed	1RPM
P13. 25	Current power-on time	1min
P13. 26	Current running time	0.1min
P13. 27	Input pulse frequency	1Hz
P13. 28	Communication settings	0. 01%
P13. 29	Encoder feedback speed	0.01Hz
P13. 30	Main frequency display	0.01Hz
P13. 31	Auxiliary frequency display	0.01Hz
P13. 32	View arbitrary memory address values	1
P13. 34	Motor temperature value	1℃
P13. 35	Target torque (%)	0.1%
P13.36	Spin change position	1
P13. 37	Power factor Angle	0.1°
P13.38	ABZ position	1
P13.39	V/F separate the target voltage	1V
P13. 40	V/F separate the output voltage	1V
P13. 41	Intuitive display of DI input status	1
P13. 42	Intuitive display of DO output status	1
P13. 43	Intuitive display of DI Function status 1(Function 01- Function 40)	1
P13. 44	Intuitive display of DI function status 2(Function 41- Function 80)	1
P13. 45	Fault information	1
P13. 58	Z-signal counter	1
P13. 59	Set frequency (%)	0. 01%
P13.60	Operating frequency (%)	0. 01%
P13.61	Frequency inverter status	1
P13. 62	Current fault code	1
P13. 63	Point-to-point host communication sends torque values	0.01%
P13.64	Number of slave stations	1
P13.65	Torque upper limit	0.1%
P13. 66	Communication expansion card model	100: reserve 200: reserve 300: reserve
P13. 67	Communication expansion card version number	Display Range

P13. 71	Display of special current for communication card	Display Range
P13. 72	Communication card error status	Display Range
P13. 73	The motor serial number	0: motor 1 1: motor 2
P13. 74	Actual output torque of motor	−100.0% ~ 100.0%
P13. 76	Cumulative power consumption auxiliary low	$0.0 \sim 999.9$
P13. 77	Cumulative power consumption auxiliary high	$0 \sim 65535$
P13. 78	Linear speed	1m/Min

Group P14: Records faults

Code	Description	Setting range	Default	Property
P14.00	Type of the first fault	0: No fault occurs 1: keep 2: accelerating overcurrent 3: deceleration overcurrent 4: constant speed overcurrent 5: accelerate overvoltage 6: deceleration overvoltage	0	X
P14. 01	Type of the second fault	S. deceleration overvoltage 7: constant speed overvoltage 8: buffer resistance overload 9: under voltage 10: Inverter overload	0	Х
	Third (most recent) failure type	10: Inverter overload 11: motor overload 11: motor overload 11: motor overload 11: input phase loss 13: output phase loss 14: The module is overheated 15: Indicates an external fault 16: Communication is abnormal 17: The contactor is abnormal 18: The current detection is abnormal 19: Abnormal motor tuning 20: The encoder or PG card is abnormal 21: Parameter read/write is abnormal 22: The inverter hardware is abnormal 23: Short circuit of motor to ground 24 ~ 25: reservations 26: Run time arrives 27: User-defined fault 1 28: User-defined fault 2 29: The power-on time arrives 30: drop load 31: PID feedback is lost at runtime 40: Fast traffic limiting times out 41: Switching motor during operation 42: Excessive speed deviation 43: Motor overspeed 45: Motor overspeed 45: Motor overspeed 45: Motor overtemperature 51: Initial position error 55: The slave machine is faulty during master/slave control	0	X
P14. 03	Third (most recent) failure frequency	0. 00HZ \sim 655. 35HZ	0.00HZ	Х
P14. 04	Third (most recent) failure current	0. 00A \sim 655. 35A	0.00A	Х

	Th:1 (tt)			
P14. 05	Third (most recent) failure busbar voltage	0. 0V \sim 6553. 5V	0.0V	X
P14.06	Third (most recent) failure input terminal status	$0 \sim 9999$	0	X
P14.07	Third (most recent) failure output terminal status	$0 \sim 9999$	0	X
P14. 08	Third (most recent) failure inverter status	$0 \sim 65535$	0	X
P14.09	Third (most recent) failure Power up time	$0s \sim 65535s$	0s	Х
P14. 10	Third (most recent) failure run time	$0.0s \sim 6553.5s$	0.0s	Х
P14. 11	Third (most recent) failure back electromotive force	0.0V \sim 6553.5V	0.0V	X
P14. 12	Temperature at the third failure	$0 \sim 200$	°C	X
P14. 13	Frequency at second failure	0. 00HZ \sim 655. 35HZ	0.00HZ	X
P14. 14	Current at the second fault	$0.00A\sim655.35A$	0.00A	X
P14. 15	Bus voltage at the second fault	0. OV \sim 6553. 5V	0.0V	X
P14. 16	Input terminal status at the second fault	$0 \sim 9999$	0	X
P14. 17	Output terminal status at the second fault	$0 \sim 9999$	0	X
P14. 18	Inverter status at the second fault	$0 \sim 65535$	0	X
P14. 19	Power-on time at the second fault	$0s \sim 65535s$	0s	Х
P14. 20	Run time at the second fault	$0.0s \sim 6553.5s$	0.0s	X
P14. 21	back electromotive force at the second fault	0.0V \sim 6553.5V	0. 0V	Х
P14. 22	Temperature at the second failure	$0 \sim 200$	$^{\circ}$	X
P14. 23	Frequency at first failure	0. 00HZ ∼ 655. 35HZ	0.00HZ	X
P14. 24	Current at first fault	$0.00A \sim 655.35A$	0.00A	X
P14. 25	Bus voltage at first fault	0.0V \sim 6553.5V	0.0V	X
P14. 26	Input terminal status at the first fault	$0 \sim 9999$	0	X
P14. 27	Output terminal status at the first fault	$0 \sim 9999$	0	X
P14. 28	Inverter status at first fault	$0 \sim 65535$	0	X
P14. 29	Power-on time at first fault	$0s \sim 65535s$	0s	X
P14. 30	Run time at first fault	$0.0 s \sim 6553.5 s$	0.0s	X
P14. 31	back electromotive force at first fault	0. OV \sim 6553. 5V	0.0V	X
P14. 32	temperature at first failure	$0 \sim 200$	$^{\circ}$ C	X

Group P16: Function code management

Code	Description	Setting range	Default	Property
P16.00	user password	$0 \sim 65535$	0	0
P16. 01	parameter initialization	0: no operation 01: Restore factory parameters, excluding the motor parameter 02: Clears record information 04: Back up current user parameters 501: Restores user backup parameters	0	0
P16. 03	Personality parameter group display selection	Ones place: User-defined parameter group display selection 0: not displayed 1: Display Tens place: User changes parameter group display selection 0: not displayed 1: Display	00	0
P16. 04	Function code Modifies properties	0: modifiable 1: cannot be modified	0	0

Group P17: Customized function code

Code	Description	Setting range	Default	Property
P17.00	User function code 0		P00.00	0
P17.01	User function code 1		P00.00	0
P17.02	User function code 2		P00.00	0
P17.04	User function code 4		P00.00	0
P17.05	User function code 5		P00.00	0
P17.06	User function code 6		P00.00	0
P17.07	User function code 7		P00.00	0
P17.08	User function code 8		P00.00	0
P17.09	User function code 9		P00.00	0
P17.10	User function code 10		P00.00	0
P17.11	User function code 11	P00. 00 ∼ P31. XX	P00.00	0
P17.12	User function code 12	100, 00 ~ rs1. AA	P00.00	0
P17.13	User function code 13		P00.00	0
P17.14	User function code 14		P00.00	0
P17.15	User function code 15		P00.00	0
P17. 16	User function code 16		P00.00	0
P17. 17	User function code 17		P00.00	0
P17. 18	User function code 18		P00.00	0
P17.19	User function code 19		P00.00	0
P17.20	User function code 20		P00.00	0
P17.21	User function code 21		P00.00	0
P17. 22	User function code 22		P00.00	0

P17. 23	User function code 23		P00.00	0
P17. 24	User function code 24		P00.00	0
P17. 25	User function code 25		P00.00	0
P17. 26	User function code 26	P00. 00 ∼ P31. XX	P00.00	0
P17. 27	User function code 27		P00.00	0
P17. 28	User function code 28		P00.00	0
P17. 29	User function code 29		P00.00	0

Group P18: Pendulum frequency, fixed length and counting

Code	Description	Setting range	Default	Property
P18.00	Wobble frequency setting method	0: relative to the center frequency 1: relative to the maximum frequency	0	0
P18. 01	Amplitude of wobbling frequency	$0.0\% \sim 100.0\%$	0.0%	0
P18. 02	Amplitude of sudden jump frequency	$0.0\% \sim 50.0\%$	0.0%	0
P18.03	Wobble period	0.1s \sim 3000.0s	10.0s	0
P18. 04	Wobble triangular wave rise time	0.1% ~ 100.0%	50.0%	0
P18.05	Set length	Om ∼ 65535m	1000m	0
P18.06	Actual length	Om ∼ 65535m	Om	0
P18.08	Pulses per meter	$0.1 \sim 6553.5$	100.0	0
P18.08	Set count value	$1 \sim 65535$	1000	0
P18.09	Specified count	$1 \sim 65535$	1000	0

Group P19: Torque control parameters

Code	Description	Setting range	Default	Property
P19.00	Speed/torque control mode selection	0: speed control 1: torque control	0	0
P19. 01	Torque setting selection in torque control mode	0: Digital setting 1 (P19.03) 1: Al1 2: Al2 3: Al3 4: PULSE pulse 5: Communication given 6: MIN (Al1, Al2) 7: MAX (Al1, Al2) (full scale of options 1-7, corresponding to P19.03 digital setting)	0	0
P19. 03	Torque digital setting in torque control mode	-200.0% ~ 200.0%	150.0%	0
P19. 05	Torque control forward maximum frequency	0.00Hz \sim Maximum frequency	50.00Hz	0
P19. 06	Torque control reverse maximum frequency	0.00Hz \sim Maximum frequency	50.00Hz	0
P19.07	Torque acceleration time	$0.00s \sim 650.00s$	0.00s	0

5

9 Torque deceleration ti	0.00s ~ 650.00s	0.00s	0
--------------------------	-----------------	-------	---

Group P20: Virtual IO

Code	Description	Setting range	Default	Property
P20.00	Virtual VDI1 terminal function selection	$0 \sim 62$	0	0
P20. 01	Virtual VDI2 terminal function selection	$0\sim 62$	0	0
P20. 02	Virtual VDI3 terminal function selection	$0 \sim 62$	0	0
P20. 03	Virtual VDI4 terminal function selection	$0 \sim 62$	0	0
P20. 04	Virtual VDI5 terminal function selection	$0 \sim 62$	0	0
P20. 05	Virtual VDI terminal status setting mode	Q: Whether the VDI is valid is determined by the state of the virtual VDOx 1: Set whether VDI is valid or not by function code P20.06 Ones place: Virtual VDI2 Hundreds place: Virtual VDI3 Thousands place: Virtual VDI4 Ten thousand place: Virtual VDI5	00000	0
P20. 06	Virtual VDI Terminal Status Settings	O: invalid I: valid Önes place: Virtual VDI1 Tens place: Virtual VDI2 Hundreds place: Virtual VDI3 Thousands place: Virtual VDI4 Ten thousand place: Virtual VDI5	00000	0
P20. 07	Function selection when AII terminal is used as DI	$0 \sim 62$	0	0
P20. 08	Function selection when AI2 terminal is used as DI	$0 \sim 62$	0	0
P20. 09	Function selection when AI3 terminal is used as DI	$0 \sim 62$	0	0
P20. 10	Valid mode selection when AI terminal is used as DI	O: Active high 1: Active low Ones place: AII Tenth place: AI2 Hundreds place: AI3	000	0
P20. 11	Virtual VDO1 output function selection	0: Internal short circuit with physical DIx 1 ~ 43: See PO4 group physical DO output selection	0	0
P20. 12	Virtual VDO2 output function selection	0; Internal short circuit with physical DIx 1 \sim 43; See PO4 group physical DO output selection	0	0
P20. 13	Virtual VDO3 output function selection	0: Internal short circuit with physical DIx 1 \sim 43: See PO4 group physical DO output selection	0	0

P20. 14	Virtual VDO4 output function selection	0: Internal short circuit with physical Dix 1 ~ 43: See PO4 group physical DO output selection	0	0
P20. 15	Virtual VDO5 output function selection	0: Internal short circuit with physical DIx I 43: See PO4 group physical DO output selection	0	0
P20. 16	VD01 output delay time	$0.0s \sim 3600.0s$	0.0s	0
P20. 17	VDO2 output delay time	$0.0s \sim 3600.0s$	0.0s	0
P20. 18	VDO3 output delay time	$0.0s \sim 3600.0s$	0.0s	0
P20. 19	VDO4 output delay time	$0.0s \sim 3600.0s$	0.0s	0
P20. 20	VDO5 output delay time	$0.0s \sim 3600.0s$	0.0s	0
P20. 21	VDO output terminal valid state selection	0:Positive logic 1: Inverse logic Ones place: VD01 Tens place: VD03 Hundreds place: VD04 Thousands place: VD04 Ten thousand place: VD05	00000	0

Group P21: Second motor parameters

Code	Description	Setting range	Default	Property
P21.00	Motor type selection	0: Ordinary asynchronous motor 1: Variable frequency asynchronous motor 2: Permanent magnet synchronous motor	0	0
P21.01	Motor rated power	0.1kW \sim 1000.0kW	Models to determine	0
P21.02	Motor rated voltage	$1\sim 2000\mathrm{V}$	Models to determine	0
P21.03	Motor rated current	0.01A ~ 655.35A(Inverter power ≤ 55KW) 0.1A ~ 6553.5A(Inverter power>55KW)	Models to determine	0
FZ1. 04	Motor rated frequency	0.01Hz to the maximum frequency	Models to determine	0
P21.05	Motor rated rotating speed	1rpm ∼ 65535rpm	Models to determine	0
P21.06	Stator resistance of induction motor	0.001 Ω \sim 65.535 Ω (Inverter power \lesssim 55KW) 0.0001 Ω \sim 6.5535 Ω (Inverter power)55KW		
P21.07	Rotor resistance of induction motor	0.001 Ω \sim 65.535 Ω (Inverter power \leq 55KW) 0.0001 Ω \sim 6.5535 Ω (Inverter power $>$ 55KW)	Models to determine	0
P21.08	Induction motor leakage reactance	0.01mH \sim 655.35mH (Inverter power \lesssim 55KW) 0.001mH \sim 65.535mH (Inverter power>55KW)	Models to determine	0
P21.09	Induction motor mutual inductance	0.01mH \sim 655.35mH (Inverter power \lesssim 55KW) 0.001mH \sim 65.535mH (Inverter power>55KW)	Models to determine	0
P21.10	Asynchronous motor no-load current	$0.01A \sim P21.03$ (Inverter power ≤ 55 KW)	Models to determine	0
P21.16	Synchronous motor stator resistance	0.001 Ω ~ 65.535 Ω (Inverter power \leq 55KW) 0.0001 Ω ~ 6.5535 Ω (Inverter power>55KW)	Models to determine	0
P21. 17	Synchronous D axis inductance	0.01mH \sim 655.35mH (Inverter power \lesssim 55KW) 0.001mH \sim 65.535mH (Inverter power>55KW)	Models to determine	0
P21. 18	Q axis inductance of synchronous motor	0.01mH ~ 655.35mH(Inverter power≤55KW) 0.001mH ~ 65.535mH(Inverter power>55KW)	Models to determine	0

P21. 21	Inverse electromotive force coefficient of synchronous machine	0.1V ~ 6553.5V	Models to determine	0
P21. 27	Number of encoder lines	$1 \sim 65535$	1024	©
P21. 28	Encoder type	0: ABZ incremental encoder 1: UVW incremental encoder 2: rotary transformer 3: sine and cosine encoder 4: wire saving UVW encoder	0	0
P21. 29	Speed feedback PG selection	O: local PG 1: extended PG 2: Pulse input (DI5)	0	0
P21. 30	ABZ encoder AB phase sequence	0: Forward 1: Reverse	0	0
P21. 31	Encoder mounting Angle	$0.0 \sim 359.9^{\circ}$	0.0°	0
P21. 32	UVW encoder UVW phase sequence	0: Forward 1: Reverse	0	0
P21. 34	Polar logarithm of rotary transformer	$1 \sim 65535$	1	0
P21.36	Speed feedback PG disconnection detection time	0.0s: No action 0.1s ~ 10.0s	0.0s	0
	Tuning selection	0: no operation 1: tuning of static parameters of asynchronous machine 2: asynchronous machine dynamic complete tuning 3: asynchronous machine static complete tuning 4: synchro on-load tuning 5: synchronizer no-load tuning	0	0
P21. 38	Speed loop proportional gain 1	$1 \sim 100$	30	0
P21. 39	Velocity loop integration time 1	$0.01s \sim 10.00s$	0.50s	0
P21.40	Switching frequency 1	0.00Hz ∼ P21.43	5.00Hz	0
P21.41	Speed loop proportional gain 2	$1 \sim 100$	20	0
P21. 42	Velocity loop integration time 2	$0.01s \sim 10.00s$	1.00s	0
	f	P21.40 \sim Maximum frequency P0-10	10.00Hz	0
P21. 44	Vector control slip gain	$50\% \sim 200\%$	100%	0
P21. 45	SVC torque filtering constant	$0.000s \sim 0.100s$	0.000s	0
P21. 47	Torque upper limit source in speed control mode	0: P21.48 setting 1: A11 2: A12 3: A13 4: PULSE pulse 5: Communication given 6: MIN (A11, A12) 7: MAX (A11, A12) The full scale of options 1-7 corresponds to the digital setting of P21.48	0	0

P21. 48	Digital setting of upper limit of torque under speed control mode	0.0% ~ 200.0%	150%	0
P21. 49	Torque upper limit source under speed control mode (power generation)	0: P02.10 setting 1: Al1 2: Al2 3: Al2 3: Al3 4: PULSE pulse 5: Communication given 6: MIN (Al1, Al2) 7: MAX (Al1, Al2) The full scale of options 1-7 corresponds to the digital setting of P02.12	0	0
P21.50	Digital setting of upper limit of torque in Speed Control Mode (power generation)	0.0% ~ 200.0%	150.0%	0
P21. 51	Excitation adjusts proportional gain	0 ~ 60000	2000	0
P21. 52	Excitation regulates the integral gain	0 ~ 60000	1300	0
P21. 53	Torque adjusts proportional gain	0 ~ 60000	2000	0
P21. 54	Torque regulation integral gain	0 ~ 60000	1300	0
P21. 55	Velocity loop integral property	Ones place: Integral separation O: invalid 1: Valid	0	0
P21. 56	Synchronous machine field weakening mode	0, 1, 2, 3	1	0
P21. 57	Synchronous machine field weakening gain	$0\sim 50$	5	0
P21. 59	Maximum torque coefficient in field weakening area	50 ∼ 200%	100%	0
P21.60	Generating torque upper limit effective enable	0: invalid 1: Valid	0	0
P21.61	power generation limit	$0.0 \sim 200.0\%$	Models to determine	0
P21.62	The second motor control mode	0: no speed sensor vector control (SVC) 1: speed sensor vector control(FVC) 2: VF control	0	0
P21.63	The second motor acceleration and deceleration time selection	0: same as the first motor 1: acceleration and deceleration time 1 2: acceleration and deceleration time 2 3: acceleration and deceleration time 3 4: acceleration and deceleration time 4	0	0
P21.64	The second motor torque is increased	0.0%: automatic torque lift 0.1% \sim 30.0%	Models to determine	0
P21.66	Second motor oscillation suppression gain	$0 \sim 100$	Models to determine	0

P21. 75	Z signal correction	0, 1	1	0
P21. 79	Low speed excitation current	0 ~ 80%	30%	0
P21.80	Low carrier frequency	0.8k ∼ P00.19	2. 0k	0
P21.81	SVC low frequency braking mode	0, 1	0	0
P21. 82	SVC Low frequency braking effective frequency	$0\sim 10.00$ HZ	2. 00HZ	0
P21. 83	SVC low-frequency braking frequency change step	0.0005 ∼ 1.0000HZ	0.0010HZ	0
P21.84	Low frequency braking current of SVC	0 ~ 80%	50%	0
P21. 85	Synchronizer SVC speed tracking	$0 \sim 1$	0	0
P21. 86	Zero servo is enabled	$0 \sim 1$	0	0
P21. 87	Switching frequency	0.00 ∼ P02.02	0.30HZ	0
P21. 88	Zero servo speed loop proportional gain	$1 \sim 100$	10	0
P21. 89	Zero servo speed loop integration time	$0.01s \sim 10.00s$	0.50s	0
P21. 90	Shutdown anti-reverse enable	$0 \sim 1$	0	0
P21. 91	Stop Angle	0.0 ~ 10.0°	0.8°	0
P21. 87	Switching frequency	0.00 ∼ P02.02	0.30HZ	0
P21. 88	Zero servo speed loop proportional gain	$1 \sim 100$	10	0
P21. 89	Zero servo speed loop integration time	$0.01s \sim 10.00s$	0.50s	0
P21. 90	Shutdown anti-reverse enable	0~1	0	0
P21. 91	Stop Angle	0.0 ~ 10.0°	0.8°	0

ES160B synchronous models refer to the following table:

Code	Description	Setting range		Property
P21. 61	The second motor control mode	0: no speed sensor vector control (SVC) 1: speed sensor vector control (FVC) 2: VF control	0	0
P21. 62	The second motor acceleration and deceleration time selection	0: same as the first motor 1: acceleration and deceleration time 1 2: acceleration and deceleration time 2 3: acceleration and deceleration time 3 4: acceleration and deceleration time 4	0	0

P21.66	Upper limit of output voltage margin of synchronizer	0% ~ 50%	5%	0
P21. 67	Synchronizer initial position Angle detection current	$50\% \sim 180\%$	80%	0
P21. 68	Synchronizer initial position Angle detection	$0 \sim 2$	0	0
P21. 70	Synchronizer salient pole rate adjustment gain	50 ~ 500	100	0
P21. 71	Maximum torque current ratio control	0, 1	0	0

Group P22: Control optimization parameter

Code	Description	Setting range	Default	Property
P22.00	DPWM switch upper frequency	5.00Hz \sim Maximum frequency	8.00Hz	0
P22. 01	PWM modulation method	0: Asynchronous modulation 1: Synchronous modulation	0	0
P22. 02	Dead zone compensation mode selection	0: No compensation 1: Compensation mode 1	1	0
P22. 03	Random PWM depth	0: Random PWM is invalid $1\sim10$: PWM carrier frequency with the depth of the machine	0	0
P22. 04	Fast traffic limiting is enabled	0: disable 1: enable	1	0
P22. 05	Maximum output voltage coefficient	100 ~ 120%	110%	0
P22. 06	Undervoltage point setting	140.0V \sim 380.0V	350. OV	0
P22.08	Low carrier frequency	$0.0\sim8.0\mathrm{kHz}$	0.0	0
P22. 09	Overpressure point setting	Three-phase 380 ~ 480V models: 200.0 V ~ 820.0 V Three-phase 200 ~ 240V models: 200.0 V ~ 400.0 V	820. OV	0
P22. 11	Low speed DC brake threshold	$0.00\sim5.00\mathrm{Hz}$	0.30Hz	0

Group P23: AI curve setting

Code	Description	Setting range	Default	Property
P23.00	AI curve 4 Minimum input	-10.00V \sim P23.02	0.00V	0
P23. 01	AI curve 4 Minimum input is set accordingly	-100.0% ∼ +100.0%	0.0%	0
P23.02	AI curve 4 inflection point 1 input	P23.00 ∼ P23.04	3.00V	0
P23. 03	AI curve 4 inflection point 1 input is set accordingly	-100.0% ∼ +100.0%	30.0%	0
P23.04	AI curve 4 inflection point 2 input	P23. 02 ∼ P23. 06	6.00V	0

P23. 05	AI curve 4 inflection point 2 input corresponding settings	-100.0% ∼ +100.0%	60.0%	0
P23.06	AI curve 4 Maximum input	P23. 04 ∼ +10. 00V	10.00V	0
P23. 07	AI curve 4 Maximum input is set accordingly	-100.0% ∼ +100.0%	100.0%	0
	AI curve 5 minimum input	-10.00V ∼ P23.10	-10.00V	0
P23. 09	AI curve 5 Minimum input is set accordingly	-100.0% ∼ +100.0%	-100.0%	0
P23. 10	AI curve 5 inflection point 1 input	P23.08 ~ P23.12	-3.00V	0
P23. 11	AI curve 5 inflection point l input corresponds to the setting	-100.0% ∼ +100.0%	-30.0%	0
P23. 12	AI curve 5 inflection point 2 input	P23. $10 \sim$ P23. 14	3.00V	0
P23. 13	AI curve 5 inflection point 2 input corresponding Settings	−100.0% ~ +100.0%	30.0%	0
P23. 14	AI curve 5 Maximum input	P23. 12 ∼ +10. 00V	10.00V	0
P23. 15	AI curve 5 Maximum input is set accordingly	-100.0% ∼ +100.0%	100.0%	0
P23. 24	AI1 sets the jump point	$-100.0\% \sim 100.0\%$	0.0%	0
P23. 25	AI1 sets the jump range	0.0% ~ 100.0%	0.5%	0
P23. 26	AI2 sets the jump point	-100.0% ∼ 100.0%	0.0%	0
P23. 27	AI2 sets the jump range	$0.0\% \sim 100.0\%$	0.5%	0
P23. 28	AI3 sets the jump point	$-100.0\% \sim 100.0\%$	0.0%	0
P23. 29	AI3 sets the jump range	$0.0\% \sim 100.0\%$	0.5%	0

Chapter 6 Fault diagnosis and elimination

6.1 Fault alarm and countermeasures

ES160(B) series universal vector inverter provides 38 alarm information and protection functions. Once a fault occurs, the protection function will act, the inverter will stop output, the inverter fault relay R1 will act, and the fault code will be displayed on the inverter display panel. When a fault occurs during use, the user can first check the table 6–1, analyze the cause of the fault, and quickly find a solution. If you still can't solve it, please contact the agent of the inverter or our company.

Note: if the motor is rotating when the fault occurs, it will stop freely until it stops.

Table 6-1 Frequency inverter fault alarm and countermeasures self-check table

Fault Code	Description	Possible causes	Solution
ERR00	No fault	/	/
ERR01	reserve		
ERR02	Acceleration overcurrent	The output loop of the inverter is grounded or short-circuited	Eliminate peripheral faults, detect whether the motor or interrupt contactor is short-circuited
		The control mode is FVC or SVC and none Identification of parameters	Set motor parameters according to the motor nameplate and identify motor parameters
		Rapid acceleration condition, acceleration time setting is too short	Increased acceleration time
		Loss rate suppression setting is not appropriate	Verify that the loss rate suppression function is enabled. Overloss quick acting current setting value is too large, recommended within 120% to 150% adjustment; The loss rate suppression gain is too small. It is recommended to adjust it within 20 to 40.
		Manual torque lift or V/F curve not suitable	Adjust manual lift torque or V/F curve
		Start the motor that is rotating	Select speed tracking to start or wait for the motor to stop before starting
		Subject to external interference	Check the historical fault records. If the current value is far from the overcurrent point value at the time of the fault, it is necessary to find the interference source. If there are no other sources of interference, it may be a problem with the driver board or the Hall device

	i	1	
ERRO3	Deceleration overcurrent	The output loop of the inverter is grounded or short-circuited	Eliminate peripheral faults, detect whether the motor or interrupt contactor is short- circuited
		The control mode is FVC or SVC and none Identification of parameters	Set motor parameters according to the motor nameplate and identify motor parameters
		Rapid deceleration condition, deceleration time setting is too short	Increase deceleration time
		Loss rate suppression setting is not appropriate	Verify that the loss rate suppression function is enabled. Overloss quick acting current setting value is too large, recommended within 120% to 150% adjustment; The loss rate suppression gain is too small. It is recommended to adjust it within 20 to 40.
		There is no brake unit and brake resistance	Add brake unit and resistor
		Subject to external interference	Check the historical fault records. If the current value is far from the overcurrent point value at the time of the fault, it is necessary to find the interference source. If there are no other sources of interference, it may be a problem with the driver board or the Hall device
	Constant speed overcurrent	The output loop of the inverter is grounded or short-circuited	Eliminate peripheral faults, detect whether the motor or interrupt contactor is short- circuited
		The control mode is FVC or SVC and none identification of parameters	Set motor parameters according to the motor nameplate and identify motor parameters
		Rapid deceleration condition, deceleration time setting is too short	Increase deceleration time
ERRO4		Loss rate suppression setting is not appropriate	Verify that the loss rate suppression function is enabled. Overloss quick acting current setting value is too large, recommended within 120% to 150% adjustment; The loss rate suppression gain is too small. It is recommended to adjust it within 20 to 40.
		Inverter selection power is too small	Eliminate peripheral faults, detect whether the motor or interrupt contactor is short- circuited
		Subject to external interference	Check the historical fault records. If the current value is far from the overcurrent point value at the time of the fault, it is necessary to find the interference source. If there are no other sources of interference, it may be a problem with the driver board or the Hall device

		Input voltage is high	Adjust the voltage to normal range
ERRO5	Accelerated overvoltage	In the process of acceleration, external forces drag the motor to run	Canaal additional names as add
		Overvoltage suppression setting is inappropriate	Confirm that the overvoltage suppression function has been enabled; if the set value of the overvoltage suppression action voltage is too large, it is recommended to adjust it within 770Y-700Y; if the overvoltage suppression gain setting is too small, it is recommended to adjust it within 30-50
		No braking unit and braking resistor installed	Install braking unit and resistor
		The acceleration time is too short	Increased acceleration time
ERRO6	Deceleration overvoltage	During the deceleration process, there is an external force that drives the motor to run	Cancel external power or install braking resistor
		Overvoltage suppression setting is inappropriate	Confirm that the overvoltage suppression function has been enabled; if the set value of the overvoltage suppression action voltage is too large, it is recommended to adjust it within 770V-700V; if the overvoltage suppression gain setting is too small, it is recommended to adjust it within 30-50
		The deceleration time is too short	Increase deceleration time
		No braking unit and braking resistor installed	Install braking unit and resistor
ERRO7	Constant speed overvoltage	Overvoltage suppression setting is inappropriate	Confirm that the overvoltage suppression function has been enabled; overvoltage suppression action voltage setting value is too large, it is recommended to adjust within 770V-700V; The overvoltage suppression gain setting is too small, it is recommended to adjust it within 30-50; The setting of the maximum rising frequency of overvoltage suppression is too small, it is recommended to adjust it within 5-20HZ
		During operation, there is external force to drag the motor to run	Cancel external power or install braking resistor
ERR08	Snubber resistor overload	The bus voltage fluctuates at the undervoltage point	Seeking technical support
ERR09	Undervoltage	momentary power failure	Enable the function of instantaneous power failure and non-stop, which can prevent instantaneous power failure and undervoltage fault
		The input terminal voltage of the inverter is not within the specification requirements	Adjust voltage to normal range
		The bus voltage is abnormal	Seeking technical support
		Rectifier bridge, buffer resistance, power board, control board abnormal	Seeking technical support
ERR10	Inverter overload	Whether the load is too large or the motor is blocked	Adjust voltage to normal range
		Inverter selection power is too small	Choose a frequency inverter with a larger power level

	i		
ERR11	Motor overload	Motor protection parameters are set properly	Set this parameter correctly
		Whether the load is too large or the motor is blocked	Reduce load and check motor and mechanical condition
ERR12	input phase loss	The three-phase power supply is abnormal	Check and eliminate problems in peripheral circuits
		The power supply board, surge protection board, and main control board are abnormal	Seeking technical support
ERR13	output phase loss	Motor failure	Check whether the motor is disconnected
		The lead wire from the inverter to the motor is abnormal	Troubleshooting peripheral faults
		Inverter three-phase output is unbalanced when the motor is running	Check whether the motor three-phase winding is normal and troubleshoot
		The IGBT of the driver is abnormal	Seeking technical support
		Ambient temperature is too high	Lower ambient temperatures
DDD14	Module	Air duct blockage	Clean up the air duct
ERR14	overheating	Damage of fan	Replace fan
		Thermistor damaged	Replace the thermistor
ERR15	External fault	Input signals of external faults through the multi-function terminal DI	Investigate peripheral faults, confirm that the machine is allowed to restart, and reset operation
		Input of external fault signal via virtual IO function	Confirm that the virtual IO group parameters are set correctly, reset the operation
	Abnormal communication	The upper computer is not working properly	Check the wiring of the host computer
		The communication line is not normal	Check the communication cable
ERR16		Communication expansion card settings are incorrect	Correctly set the communication expansion card type
		Communication parameter group setting is incorrect	Correctly set communication parameters
		After the above tests, you can try to restore the factory settings	
ERR17	Contactor anomaly	Abnormal power supply board and driver board	Replace the power board or driver board
		Contactor anomaly	Replace contactor
ERR18	Abnormal current detection	Check for Hall device abnormalities	Replacing the Hall Device
		The power supply board or driver board is abnormal	Replace the power board or driver board
ERR19	Motor tuning anomaly	Motor parameters are not set according to the nameplate	Set motor parameters according to the nameplate
		Parameter identification timed out	Check the leads from the inverter to the motor
		Abnormal encoder	Check whether the encoder line number is set correctly; Check the signal cable connection of the encoder is correct and firm

ERR20	The encoder or PG card is abnormal	The encoder model does not match	Set the encoder type according to the actual situation
		Encoder connection error	Check the power supply and phase sequence of the PG card
		Encoder damage	Replacement of encoder
		PG abnormal card	Replace the PG card
ERR21	Parameter read and write exception	The EEPRROM chip is damaged	Replacing the main control board
ERR22	Inverter hardware abnormality	Overvoltage exists	Handling overvoltage faults
ERRZZ		there is an overcurrent	Deal with overcurrent faults
ERR23	Motor short circuit to ground	Motor ground fault	Replace the cable or motor
ERR24	reserve		
ERR25	reserve		
ERR26	Run time arrival	The accumulated running time reaches the set value	Seek technical support
ERR27	User-defined fault 1	Input the signal of user- defined fault 1 through the multi-function section DI	Reset operation
	lault 1	Input signal of user-defined fault 1 through virtual IO function	Reset operation
ERR28	User-defined fault 2	Input the signal of user- defined fault 2 through the multi-function section DI	Reset operation
		Input signal of user-defined fault 2 through virtual IO function	Reset operation
ERR29	The power-on time arrives	The cumulative power-on time reaches the set value	Seek technical support
ERR30	Drop load	The inverter running current is less than P11.31	Confirm whether the load is disengaged or P11.31, Whether the parameter setting of P11.32 conforms to the actual operating conditions
ERR31	PID feedback lost at runtime	PID feedback is less than PO9.26 set value	Detect PID feedback signal or set PO9.26 to a suitable value
EDD40	Fast traffic limiting times out	Whether the load is too large or the motor is blocked	Reduce load and check motor and mechanical condition
ERR40		Inverter selection power is too small	Choose a frequency inverter with a larger power level
ERR41	Switch motor during operation	Change current motor selection through terminals during inverter operation	Switch the motor after the inverter stops
ERR42	Excessive velocity deviation	Encoder parameter setting is incorrect	Correctly set encoder parameters
		No parameter self-identification	Perform motor parameter self- identification
		Excessive speed deviation detection parameter setting is unreasonable	Set the detection parameters reasonably according to the actual situation
ERR43	Motor overspeed	Encoder parameter setting is incorrect	Correctly set encoder parameters
		No parameter self-identification	Perform motor parameter self- identification
		Excessive speed deviation detection parameter setting is unreasonable	Set the detection parameters reasonably according to the actual situation

ERR45	Motor overtemperature	Cables to the temperature sensor are loose	Check cables to the temperature sensor and rectify faults
			Increase the carrier wave or take other cooling measures to dissipate the heat of the motor
	position	Inverter output phase loss	Check motor wiring and troubleshoot
ERR51		Inverter current detection fault or Hall damage	Check and troubleshoot the hall
		Motor inductance value is too large	Shield this fault through function code P11.17
ERR55	Slave fault during master- slave control	The slave machine fails, check the slave machine	Troubleshoot according to the slave fault code

6.2 Querying Fault Records

ES160(B) series universal vector inverter provides the function of recording the last three fault information. You can check the latest fault code, the second—to—last fault code, the third—to—last fault code, and the fault code of the inverter at the latest fault by viewing the parameters in the P14.xx group. Output frequency, output current and bus voltage conditions. It can provide reference information for users to judge and solve faults.

6.3 Fault Reset

When ES160(B) series universal vector inverter has a fault, if you want to exit the fault alarm state, you can reset the fault by pressing the ESC button after eliminating the fault cause; if the fault is not cleared, the inverter will continue to stay in the fault state, and the keyboard number The tube will continue to display fault codes.

Chapter 7 Electromagnetic Compatibility Guidance

7.1 Definitions

Electromagnetic compatibility means that electrical equipment can coexist under the condition of limited time, space and spectrum resources without causing performance degradation. Equipment, sub-systems, and systems should not generate electromagnetic emissions that exceed the requirements of regulations or standards, and can meet the requirements of immunity.

7.2 Introduction to EMC Standards

According to the requirements of the national standard GB/T12668.3, the inverter needs to meet the requirements of electromagnetic interference and anti-electromagnetic interference.

Our existing products implement the latest international standards: IEC/EN61800-3:2004 (Adjustable speed electricalpower drive systems part 3:EMC requirements and specific test methods), which is equivalent to the national standard GB/T12668.3.

IEC/EN61800-3 mainly inspects the inverter from two aspects: electromagnetic interference and anti-electromagnetic interference. Electromagnetic interference mainly tests the radiated interference, conducted interference and harmonic interference of the inverter (for domestic inverters, there are requirements). The anti-electromagnetic interference mainly affects the conducted immunity, radiation immunity, surge immunity, rapid mutation burst immunity, ESD immunity and low frequency end immunity of the power supply of the inverter (specific test items are: 1, Input voltage sag, interruption and change immunity test; 2. Commutation notch immunity test; 3. Harmonic input immunity test; 4. Input frequency change test; 5. Input voltage unbalance test; 6. Input voltage fluctuation test) to test. Tested in accordance with the strict requirements of the above IEC/EN61800-3, our products are installed and used in accordance with the instructions shown in 8.3, and will have good electromagnetic compatibility in general industrial environments.

7.3 EMC guidance

7. 3. 1 Influence of harmonics

The high-order harmonics of the power supply may cause damage to the inverter and its surrounding electrical equipment. In places with poor power quality, it is recommended to install an AC input reactor or a current harmonic filter. Due to the influence of harmonics, the selection of the input leakage circuit breaker refers to the relevant description of the input side wiring of the main circuit.

The current of the inverter motor power cable contains high-order harmonics, so the thermal relay may malfunction due to resonance, and it is necessary to reduce the carrier frequency or install an output reactor. It is recommended not to install a thermal relay before the motor when using the inverter, but to use the overcurrent protection function of the inverter.

7.3.2 Electromagnetic interference and Installation Precautions

1. The ground cables of frequency inverters and other electrical products should be well grounded. When using EMC filters, you must use permanently fixed ground connectors, which do not pass through connectors.

2. The input and motor power cables of the frequency inverter and weak current signal cables (such as control signal cables) should be arranged separately from each other as far as possible. If possible, the weak current signal cables should be routed separately through metal troughs.

3. It is recommended to use shielded cables or armored cables for the input and motor power cables of the inverter. The shielding layer or armor at both ends of the cable needs to be reliably grounded. It is recommended to use shielded twisted pair cables for weak current signal lines that are susceptible to interference, and the shielding layer should be reliably grounded.

4. For motor cables with a length of more than 50m, it is required to install an output filter or reactor.




Figure 8-1 Cable requirements and shielded grounding method

7.3.3 Grounding

1. It is recommended that the inverter and other equipment be grounded separately; If common ground points are required, single point grounding is required. Common ground cables are not recommended.

2. The large-section grounding cable should be used as much as possible to ensure that the grounding impedance is as low as possible. Due to the cable with the same cross-sectional area, the high-frequency impedance of the flat conductor is smaller than that of the round conductor, so it is better to use the flat cable. The grounding cable should be as short as possible and the grounding point should be as close to the drive as possible.

3. If the motor power cable adopts a 4-core cable, the ground wire in the 4-core cable must be grounded on the inverter side, and the other side is connected to the ground terminal of the motor; The best grounding effect can be obtained if the motor and the inverter have their own dedicated grounding points.

4. If the ground terminals of various components in the control system are connected together, the noise source formed by the ground leakage current will affect other peripheral equipment outside the inverter in the control system. Therefore, in the same control system, the grounding of the inverter and the weak current equipment such as computers, sensors or audio equipment should be separated and cannot be connected together.

5. In order to obtain a lower high-frequency impedance, the fixing bolts of each device can be used as the high-frequency terminals connected to the rear panel of the cabinet. Please pay attention to removing the insulating paint on the fixing points during installation.

 $\hat{6}$. The grounding cable should be laid away from the wiring of the I/O part of the noise-sensitive equipment, and pay attention to the grounding wire should be as short as possible.






Figure 8-2 Grounding method of the inverter and other devices is not recommended

7.3.4 Measures to deal with electromagnetic interference caused by peripheral electrical equipment to frequency inverter Relays, contactors, electromagnetic brakes, etc. in the surrounding environment of the inverter may generate electromagnetic interference. When the frequency inverter is misoperated by electromagnetic interference, the following methods are recommended:

 Install a surge suppressor on the device that generates interference; 2. Add an EMC filter to the input power cable of the inverter, and the

specific operation will be introduced later;

3. Use shielded wire or twisted pair wire for the control signal and detection circuit of the inverter, and the shielding layer of the shielded wire needs to be grounded reliably (360 degree loop connection).

7.3.5 How to deal with electromagnetic interference caused by frequency converter to peripheral equipment

The electromagnetic interference caused by frequency inverter to peripheral equipment can be divided into two types, one is conductive interference, the other is radiation interference. For different interference situations, refer to the following methods:

1. The signals of instruments, meters, receivers and sensors used for measurement are generally weak current signals. If they are close to the inverter or in the same control cabinet, they are prone to interference and malfunction. It is recommended that the weak current signal be kept away from the interference source as far as possible; do not bundle the weak current signal line and the power cable together; The signal line should be shielded or twisted pair, and the shielding layer of the shielded line should be well grounded (360-degree loop connection as far as possible); The power cable is added with a ferrite magnetic ring (nickel-zinc magnetic ring, which suppresses the interference of frequencies above 30MHz) and wound around 2 to 3 turns. In order to obtain a better effect, an EMC filter can also be used.

2. When the interfered equipment and the inverter are powered by the same power supply, it is easy to cause conducted interference. It is recommended to add an EMC filter to the input port of the inverter. The specific operation is described in the last section of this chapter;

3. The peripheral equipment is grounded separately, which can reduce the common mode interference caused by the common ground impedance.

7.3.6 Leakage current and treatment

There is a distributed capacitance between the power cable and the ground. The longer the power cable is, the greater the distributed capacitance between the power cable and the ground, and the greater the leakage current; the higher the carrier frequency, the greater the leakage current. Leakage current can be reduced by shortening the power cable length and reducing the carrier frequency. However, reducing the carrier frequency will lead to increased motor noise, and a balance needs to be found between the two.

7.3.7 Precautions for installing EMC filter on power input

- 1. When using the filter, please use it strictly according to the rated value; since the filter is a Class I electrical appliance, its metal casing must be in good contact with the metal ground of the installation cabinet in a large area, and good grounding continuity is required, otherwise there will be danger of electric shock and serious impact. EMC effect.
- 2. The filter ground must be connected to the same common ground as the inverter PE terminal, otherwise the EMC effect will be seriously affected.
- 3. In the cabinet, the installation position of the filter should be close to the inlet end of the input power cable, and the power input cable of the filter should be as short as possible in the control cabinet.
- 4. If the input line and output line of the filter are laid too close, high-frequency interference will bypass the filter and directly couple through the input line and output line of the filter, making the power filter useless.
- 5. The filter housing usually has a dedicated ground terminal. However, if the filter is connected to the control cabinet housing with a wire, it is equivalent to a dummy for high frequency interference. This is because the high-frequency impedance of the long wire is so large that it cannot effectively bypass. The correct installation method is to stick the filter casing on the conductive plane of the metal casing in a large area. When installing, please pay attention to removing the insulating paint to ensure reliable connection.

Chapter 8 Description of optional parts

8.1 Optional Brake Resistors

All series of ES160(B) series universal vector inverters provide builtin braking unit. Users can choose different braking resistor resistance
and power according to the actual situation, but the resistance cannot be
less than the recommended value in Table 8-1. The braking resistor power
can be selected big. The selection of the braking resistor needs to be
determined according to the power generated by the motor in the actual
application system, which is related to the inertia of the system, the
deceleration time, and the load energy. Users should choose according to
the actual situation. The greater the inertia of the system, the shorter
the required deceleration time, and the more frequent braking, the greater
the power and the smaller the resistance value of the braking resistor
that needs to be selected.

Table 8-1 Braking resistance selection table of ES160(B) series universal vector inverter

Frequency inverter model	Recommended power for brake resistance	Recommended brake resistance
DRS ES160 (B) -3T-0R7G/1R5P	≥ 200W	≥ 360 Ω
DRS ES160 (B) -3T-1R5G/2R2P	≥ 400W	≥ 180 Ω
DRS ES160 (B) -3T-2R2G/4R0P	≥ 400W	≥ 180 Ω
DRS ES160 (B) -3T-4R0G/5R5P	≥ 800W	≥ 90 Ω
DRS ES160 (B) -3T-5R5G/7R5P	≥ 1000W	≥ 60 Ω
DRS ES160 (B) -3T-7R5G/011P	≥ 1000W	≥ 60 Ω
DRS ES160 (B) -3T-011G/015P	≥ 2000W	≥ 30 Ω
DRS ES160(B)-3T-015G/018P	≥ 2000W	≥ 30 Ω
DRS ES160 (B) -3T-018G/022P	≥ 2100W	≥ 29 Ω
DRS ES160 (B) -3T-022G/030P	≥ 2200W	≥ 28 Ω
DRS ES160 (B) -3T-030G/037P	≥ 3000W	≥ 24 Ω
DRS ES160 (B) -3T-037G/045P	≥ 3700W	≥ 20 Ω
DRS ES160 (B) -3T-045G/055P	≥ 4500W	≥ 16 Ω
DRS ES160 (B) -3T-055G/075P	≥ 5500W	≥ 13 Ω
DRS ES160 (B) -3T-075G/090P	≥ 7500W	≥9Ω
DRS ES160 (B) -3T-090G/110P	≥ 9300W	≥ 6.8 Ω
DRS ES160(B)-3T-110G/132P	≥ 11000W	≥ 6. 2 Ω
DRS ES160 (B) -3T-132G/160P	≥ 13000W	≥ 4. 7 Ω
DRS ES160 (B) -3T-160G/185P	≥ 15000W	≥ 3.9 Ω
DRS ES160 (B) -3T-185G/200P	≥ 15, 000W	≥ 3.9 Ω

DRS ES160 (B) -3T-200G/220P	≥ 18, 500W	≥3Ω
DRS ES160 (B) -3T-220G/250P	≥ 20, 000W	≥ 2.7Ω
DRS ES160 (B) -3T-250G/280P	≥ 22, 500W	≥ 2. 4 Ω
DRS ES160 (B) -3T-280G/315P	≥ 25, 500W	≥ 2 Ω
DRS ES160 (B) -3T-315G/355P	≥ 30,000W	≥ 1.8Ω
DRS ES160 (B) -3T-355G/400P	≥ 33,000W	≥ 1.5Ω
DRS ES160 (B) -3T-400G/450P	≥ 42,000W	≥ 1. 2 Ω

Note: The wire connecting the braking resistor should pay attention to select the cable with a withstand voltage of AC450V or more and a temperature resistance of $105\,^{\circ}\text{C}$.

Appendix A ModBus Communication Protocol

1 Summarize

ES160(B) series universal vector inverter provides RS485 serial port communication interface and adopts MODBUS communication protocol. Users can realize centralized control through computer or PLC, set inverter running commands, modify or read function code parameters, and read inverter working status and fault information. And it can be used as a host, which is convenient for users to perform synchronous operation of multiple frequency inverters.

2 Serial port data format

The user can set the corresponding communication parameters through the parameters of the PO8.XX communication function group.

Local address: can be set to 1~247 (can not conflict with other devices in the network), when it is 0, it is the broadcast address.

Communication baud rate: 4800, 9600, 19200 or 38400bps can be selected.

Communication format: select 1+8+1 without verification;

Even parity 1+8+1+1;

Odd parity 1+8+1+1;

Master-slave communication mode: You can choose the machine as the master or the slave.

3 Protocol frame format

Frame start ≥ Sla 3.5 character addr time interval (1by	ess code (1	Data (Nbyte)	CRC16 (2bvte)	End of frame ≥ 3.5 character interval
---	---------------	-----------------	------------------	---------------------------------------

附录

4 Address range of communication register

0000H ~ 1FFFH (P00 ~ P31) Write save ROM address, 00 ~ 1FH 2000H ~ 3FFFH Write does not save RAM address, 00H: Invalid command 01H: Forward running 02H: Reverse running 03H: JOG forward rotation			
00H: Invalid command 01H: Forward running 02H: Reverse running	+2000H		
01H: Forward running 02H: Reverse running			
4000H 04H: JOG reverse 05H: Slave stop 06H: Slow down and stop 07H: Free stop			
OSH: The fault resets			
4002H Analog output A01 control: 0-7FFF me	eans 0-100%		
4003H Analog output AO2 control: 0-7FFF m	Analog output AO2 control: 0-7FFF means 0-100%		
4004H Pulse output FMR control: 0-7FFF mea	ans 0-100%		
The user can read the data of t state register through the 0x03 f know the working state of the invertion 0001H: Forward running 0002H: Reverse running 0003H: Inverter stopped	the special function to ter:		
Communication setting value -10000 to 10000	(decimal)		
Operating frequency			
5000H	Bus voltage		
S 5003H The output voltage	The output voltage		
8 CRC(high byte) DCH	DCH		
Output current	Output current		
5005H Output Power	Output Power		
5006H output torque	output torque		
5007H running speed	running speed		
☐ 5008H DI input flag	DI input flag		
S 5009H DO output flag	DO output flag		
Σ 500AH AI1 voltage	AI1 voltage		
500BH AI2 voltage	AI2 voltage		
S005H	AI3 voltage		
500DH Count value input			

	500EH	Length value input		
	500FH	Load speed		
	5010H	PID settings		
	5011H	PID feedback		
	5012H	PLC steps		
8	5013H	PULSE Input pulse frequency, unit 0.01kHz		
communication settings	5014H	Feedback speed, unit 0.1Hz		
<u>F</u> i.	5015H	Remaining running time		
Ca	5016H	AI1 voltage before correction		
ii	5017H	AI2 voltage before correction		
#	5018H	AI3 voltage before correction		
set	5019H	Line speed		
į į	501AH	Current power-on time		
l ags	501BH	current running time		
"	501CH	PULSE Input pulse frequency, unit 1Hz		
	501DH	Communication settings		
	501EH	Actual feedback speed		
	501FH	Main frequency X display		
	5020H	Auxiliary frequency Y display		
Communication settings	5F00H	User password		
n settings	5F01H	1: Restores factory parameters 2: Records information clearly 4: Restore user backup parameters 5: Backs up the current user parameters		
Fault message	8000Н	0000: No fault 0001: Reserve 0002: Accelerating Overcurrent 0003: Deceleration overcurrent 0004: Constant Speed overvoltage 0005: Accelerating overvoltage 0006: Deceleration overvoltage 0007: Constant Speed overvoltage 0008: Buffer resistor overload fault 0009: Bus undervoltage fault 00008: Motor overload 0008: Motor overload 00000: Phase absence at the input side 00000: Output side phase deficiency 0000E: Module overheat fault 000F: External fault 000F: External fault 0010: Communication failure 0011: Contactor is faulty 0012: Current Detection fault 0013: Motor self-learning fault 0014: The encoder /PG card is faulty 0015: EEPROM operation fault 0016: The inverter hardware is faulty 0017: Motor short circuit fault to ground 0018: Reserve		

```
001A: Indicates that the running time arrives 001B: User-defined fault 1 001C: User-defined fault 2 001D: The power-on time arrives 001E: Drop load 001F: PID feedback loss at runtime 0028: Fast traffic limiting timeout fault 0029: Running cut-off motor is faulty 002A: The speed deviation is too large 002B: Motor excess speed 002D: The motor is overheated 005A: Reserve
Fault message
                      H0008
                                                                                                                          005B: Reserve
005C: The initial position is incorrect
005E: The speed feedback is incorrect
                      8000H
Fault message
                                                                                                                          0000: No fault
0001: Wrong password
0002: Command code error
0003: CRC check error
                                                                                                                          0004: Invalid address
0005: Invalid parameter
0006: Invalid parameter change
0007: System locked
                      8001H
                                                                                                                           0008: EEPROM operation in progress
```

```
C language code of CRC16:
unsigned short GetCRC (unsigned char *data, unsigned short length)
unsigned short j;
unsigned short crc = 0xFFFF:
while (length --)
crc ^= *data ++:
for (j = 0; j < 8; j ++)
if (crc & 0x01)
        crc = (crc >> 1) ^oxa0001;
else
crc = crc >> 1;
return (crc);
```



Shenzhen Dirise Electric Technology Co., Ltd

Head Quarters: #6 Skyworth Innovation Valley, Baoan District,

Shenzhen, China

Production Base: No.11 Sangyuan Road, Chenwu Village,

Houjie Town, Dongguan, China Switchboard: 0755–2605 2805

Service Hotline: 400–8010–750
Official Website: http://www.dirise.cn



QR Code